



M Y H O M E



Rocal provides the warmth and the touch
of class your home needs,

with our wood heating systems adapted to
any space, environment or requirement.

We believe in a sustainable future and
trust in renewable energy sources to bring
comfort to your home.



Rocal

Rocal has had the same vocation since it was founded in 1982: to create a range of products **freestanding stoves, insert modules, hearths, barbecues...** that lend your home all the comfort of a wood fire.



Our factory is in Centelles, just outside Barcelona.

Our more than 30 years' experience in the home heating industry are the best guarantee of our products' quality.

Backed by the best human and technical team, Rocal is growing daily and expanding its horizons on a national and international scale.



Quality and design

Rocal offers a wide range of products for you to choose the one that best suits your home. Our stoves are the result of hi-tech manufacturing methods combined with handcrafted finishes. A process in which every attention is paid to detail and only the highest quality materials are used.

We aim to provide functional design that is pleasing to the eye. We want our products to fit in with your projects.



Innovation and efficiency

We are committed to continuous product improvement, innovation and efficiency, and that has put our range right out in front. We use the latest technology to achieve optimal performance with minimal emissions, which also means considerable fuel savings.



Guarantee and safety

Feel safe in the knowledge that our fireplaces are long-lasting and that our products are tested in compliance with European quality standards.

One of our priority objectives is to ensure safety in your home through quality products and professional distributors and fitters.



Wood

An ecological, economical biomass fuel. A natural fuel that man has used since time began. It is the renewable energy source par excellence. Using wood instead of fossil fuels reduces the greenhouse effect, as it does not increase the carbon dioxide in the atmosphere.

Furthermore, wood is easy to find, relatively cheap to obtain and contributes to clearing the forest floor.

Don't forget that wood burns slowly and elegantly and provides that special touch that makes a house a home.

01.

DESIGN FREESTANDING STOVES

10-49

12	Born
16	Oval
18	Angle
22	Vertex
24	City
26	Drop
29	Mini Drop
30	D-10 graffiti
32	D-9
36	D-7
37	D-8
38	Aitana
40	Barbara-90
42	Gala
44	Giselle 90
46	Estela

48	General features
49	Custom adaptations

02.

FREESTANDING STOVES

50-67

52	Habit +T 70A / 80 / 100
56	Habit 50V +T Habit 40V
58	Habit +T 73 / 93 TC
60	Habit +T 76 LD/LI
62	Habit +T 80 / 100 DC
64	Hebar

03.

FIREBOXES

G series

68-89

70	G300/350/400 G300/350/400 +plus
74	G425/450/500 G425/450/500 +plus
76	G505
78	G450DC
80	G300 LD/LI +plus G300 LD/LI +plus
82	G450 LD/LI
86	General features
87	Optional items
88	Fitting accessories

04.

INSERTS

90-121

92	ARc	ARc + plus
	70 / 70 A / 70 C / 80 / 100	

96	ARc	ARc + plus
	50V	

98	ARc 40V
----	---------

100	ARc	ARc + plus
	80 DC / 100 DC	

102	ARc	ARc + plus
	76 LD/LI	

104	ARc	ARc + plus
	96 LD/LI	

106	ARc	ARc + plus
	73 TC	

108	ARc	ARc + plus
	93 TC	

110	General features
-----	------------------

111	Optional items
-----	----------------

112	RCr graffiti
	70 / 70 A / 80 / 100

116	RCr classic
	65 / 70 / 80

118	General features
-----	------------------

119	Optional items
-----	----------------

121	Fitting accessories
-----	---------------------

05.

THERMO-
FIREPLACES

122-127

124	Termogar LN70
-----	---------------

126	Fitting accessories
-----	---------------------

126	How it works
-----	--------------

127	Fitting accessories
-----	---------------------

06.

BARBECUES

128-133

130	Plek 66 inox
-----	--------------

132	Palma 75 inox jardín
-----	----------------------

132	Palma 75 inox porche
-----	----------------------

133	Fornells inox jardín
-----	----------------------

133	Fornells inox porche
-----	----------------------

ECONTROL

134	Smart combustion
-----	------------------

OTHER PRODUCTS

135	Ash vacuum cleaner
-----	--------------------

135	Spray paint
-----	-------------

SYMBOLS

135	Symbols
-----	---------

01. DESIGN FREESTANDING STOVES



01. DESIGN FREESTANDING STOVES

Our Freestanding stoves are distinguished by their balanced design and excellent hand-crafted finishes that do not eschew technology, which enables us to achieve excellent performance in terms of efficiency, output and minimum particle emission.

We use the most appropriate material for each part of the stove (steel, stainless steel, vermiculite, fire brick...), along with heat resistant paint for the outer finish.

We make versions to suit any space in your home.

BORN

Born is a triangle-shaped, central freestanding stove. Its three sides, each offering a great view of the fire, make it incredibly transparent with modern, up-to-date, simple lines.

FEATURES

- Double ventilated hood for hot air.

Ceiling plate.

Heat resistant, anti-smoke, anti-odour paint.

HRC glass (self-cleaning).

Ember grate and ash pan.

Optional external air inlet.
- Direct smoke pipe


Preheated primary and secondary air.

More details:
Page 48 - 49

BORN

X1315

	75%
	14,1 kW
	9,5-16,5 kW
	0,13%
	79 mg/Nm³
	4,2 kg/h
	156 kg
	33 cm
NOx	150 mg/Nm³
OGC	111 mg/Nm³
	UNE EN-13240

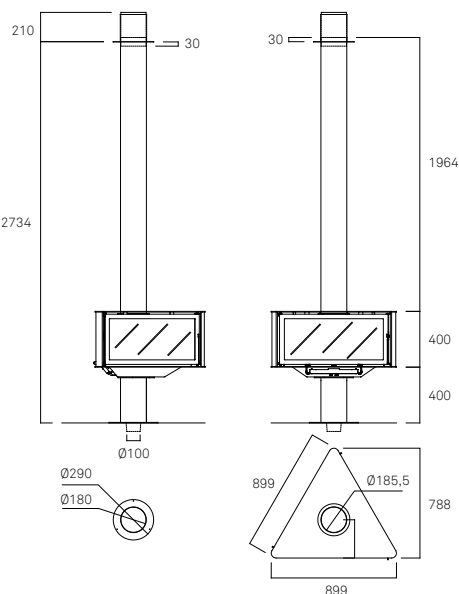




01. DESIGN FREESTANDING STOVES



● BORN suspended

BORN SUSPENDED

Includes an adjustable attachment to affix the fireplace, depending on the conditions of the ceiling.

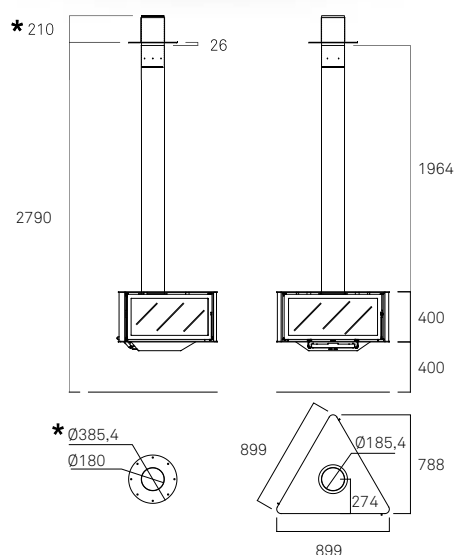

*example of a ceiling crest suitable for concrete roof

01. DESIGN FREESTANDING STOVES



● OVAL

OVAL

With an oval finish, this fireplace offers value that borders on excellence. Additionally, its compact shape means that an Oval fireplace can easily fit in any space in the house.

FEATURES

Double ventilated hood for hot air.

Ceiling plate.

Heat resistant, anti-smoke, anti-odour paint.

Preheated primary and secondary air.

Tertiary or safety air.

Optional external air inlet.

Ember grate and ash pan.

Direct smoke pipe

Vermiculite lining in black.

Option EControl automatic combustion control.



More details:

Page 48 - 49

OVAL

X1325

	91,1%
	8,4 kW
	6-10 kW
	0,078%
	19,98 mg/Nm ³
	2 kg/h
	112 kg
	33 cm
NOx	86,91 mg/Nm ³
OGC	51,55 mg/Nm ³
	UNE EN-13240

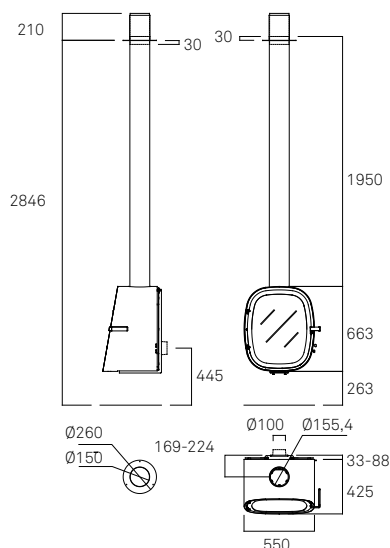

A 220
B 155
C 260



A4565

Optional stand.





ANGLE

This model stands out for its versatility: it can be fitted as a corner or front-facing fireplace. It also offer some great results.

- FEATURES**

 - Double ventilated hood for hot air.
 - Ceiling plate.
 - Heat resistant, anti-smoke, anti-odour paint.
 - Preheated primary and secondary air.
 - Tertiary or safety air.
- Optional external air inlet.
 - Direct smoke pipe
 - Vermiculite lining in black.
 - Option EControl automatic combustion control.


More details:
Page 48 - 49

ANGLE
X1330

η	81,3 %
 nom	7,25 kW
	5,5 - 9,5 kW
	0,09 %
	26,14 mg/Nm ³
	1,92 kg/h
	139 Kg
	33 cm
NOx	88,64 mg/Nm ³
OGC	69,78 mg/Nm ³
	UNE EN-13240



A4565
Optional stand.

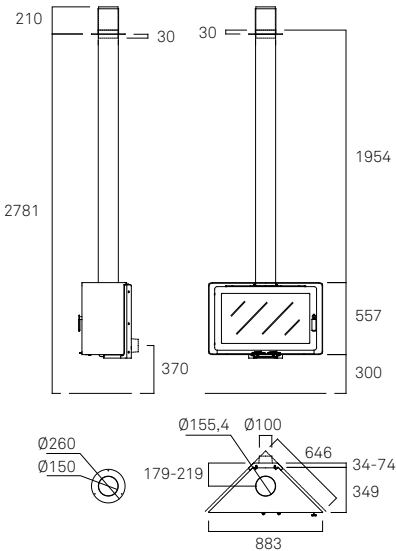



01. DESIGN FREESTANDING STOVES



● ANGLE WITH PIVOTING SUPPORT



ANGLE WITH PIVOTING SUPPORT




X1330-2
90-degree remote-controlled
pivoting wall support



01. DESIGN FREESTANDING STOVES



● VERTEX

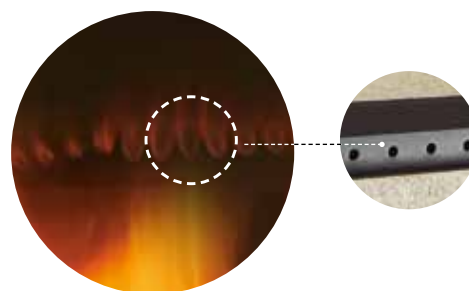

Tertiary or safety air.

Helps to increase performance: represents an extra contribution of oxygen that helps to better burn combustion gases.

VERTEX

Architectural, refined and compact, it fits in anywhere. Its double front offers a clear view of the fire. Vertex is modern and current.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Ember grate and ash pan.
Preheated primary and secondary air.
Tertiary or safety air.
Optional external air inlet.
HRC glass (self cleaning).
Direct smoke pipe



Vermiculite lining in black.
Option EControl automatic combustion control.

More details:
Page 48 - 49

VERTEX

X1310

η	89,00%
nom	10,5 kW
	7-12,5 kW
CO	0,10%
	24,88 mg/Nm ³
kg/h	3 kg/h
kg	128 kg
cm	33 cm
NOx	82,98 mg/Nm ³
OGC	68,77 mg/Nm ³
	UNE EN-13240

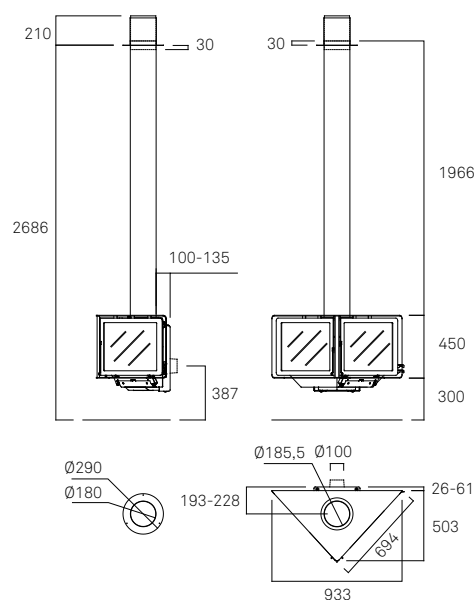

A Ø350
B Ø180
C 205



A4555
Optional round stand.



Combustion chamber.

01. DESIGN FREESTANDING STOVES



CITY

A freestanding stove for urban homes that is ready to stand out in a modern context. Discover its straight lines and how it leaves the fire completely visible. Offers extra firewood capacity with no loss of combustion quality.

FEATURES

Double ventilated hood for hot air.

Ceiling plate.

Heat resistant, anti-smoke, anti-odour paint.

Preheated primary and secondary air.

Tertiary or safety air.

Optional external air inlet.

Direct smoke pipe

Vermiculite lining in black.

Option EControl automatic combustion control.

More details:

Page 48 - 49

CITY

X1300V3



η	85,1%
nom	14,1 kW
	9,5 - 17 kW
CO	0,08%
	28,72 mg/Nm ³
kg/h	3,6 kg/h
kg	152 kg
cm	40 cm
NOx	62,77 mg/Nm ³
OGC	63,30 mg/Nm ³
	UNE EN-13240

A+

AEFECC 7*

Stelle ambientale
★★★★★
Decreto 7 novembre 2017 n. 169

CONTO TERMICO

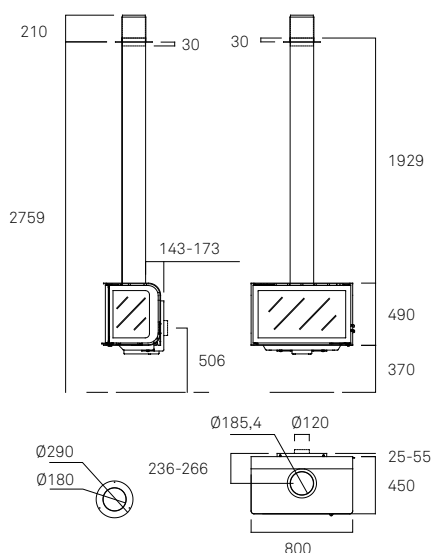

A Ø350
B Ø180
C 300



A4535V3

Optional round stand.



01. DESIGN FREESTANDING STOVES





DROP

Drop is sheer emotion. Its vertical line and rounded forms seek to adapt to and, at the same time, become the focal point of your home; with no aim to provoke indifference or to blend in.

FEATURES

- Double ventilated hood for hot air.

Ceiling plate.

Heat resistant, anti-smoke, anti-odour paint.

Preheated primary and secondary air.

Tertiary or safety air.

Optional external air inlet.
- Ember grate and ash pan.

Direct smoke pipe

Vermiculite lining in black.

Option EControl automatic combustion control.

More details:
Page 48 - 49



DROP	
X1320	
	85,03%
	9,9 kW
	6,5 - 11,5 kW
	0,093%
	9,10 mg/Nm³
	2,64 kg/h
	148 kg
	33 cm
NOx	113 mg/Nm³
OGC	67 mg/Nm³
	UNE EN-13240

A+

AEFECC | 7*

Stelle ambientale
★★★★★
DECRETO 7 NOVEMBRE 2007 n. 109

CONTO TERMICO

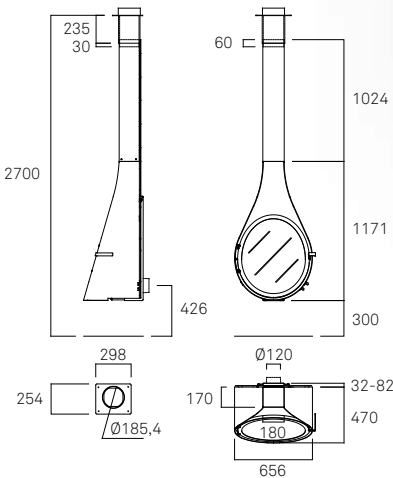

A4560
Optional round stand.

MINI DROP



MINI DROP

X1321

η	85,1%
 nom	8,1 kW
	3,8 - 9,5 kW
	0,073%
	29,2 mg/Nm ³
	2,14 kg/h
	113 kg
	25 cm
NOx	92 mg/Nm ³
OGC	63 mg/Nm ³
	UNE EN-13240

A+

AEFECC 7*

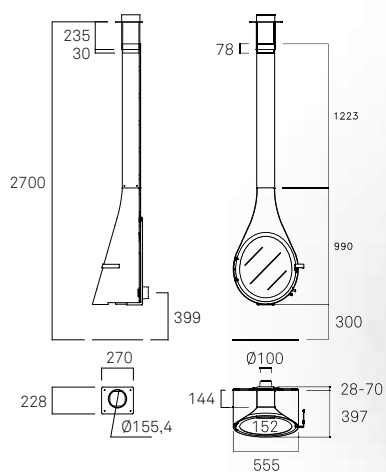
Stelle ambientale
★★★★★
DECRETO 7 NOVEMBRE 2019 N. 188CONTO TERMICO 

Combustion chamber (back): external air inlet and combustion air preheating.

01. DESIGN FREESTANDING STOVES



● D-10 Graffiti



A4551
Optional round stand.

D-10 Graffiti

This model offers a fire vision from the front and the sides. Screen-printed glass. This stove can be suspended or in a foot and will outstand in any atmosphere.

FEATURES

Heat resistant, anti-smoke, anti-odour paint.
Preheated primary and secondary air.
Tertiary or safety air.
Optional external air inlet.
Cover pipe.
Ceiling plate.

Vermiculite lining in black.

Lateral doors opening for reload and frontal door opening for cleaning.

Steel-coated vermiculite base.

Option EControl automatic combustion control.


More details:

Page 48 - 49

D-10 Graffiti

X1267


η	79%
nom	15,4 kW
	10 - 18,5 kW
CO	0,10%
	35,59 mg/Nm ³
	4,2 kg/h
	144 kg
	33 cm
NOx	37,6 mg/Nm ³
OGC	11,54 mg/Nm ³
	UNE EN-13240

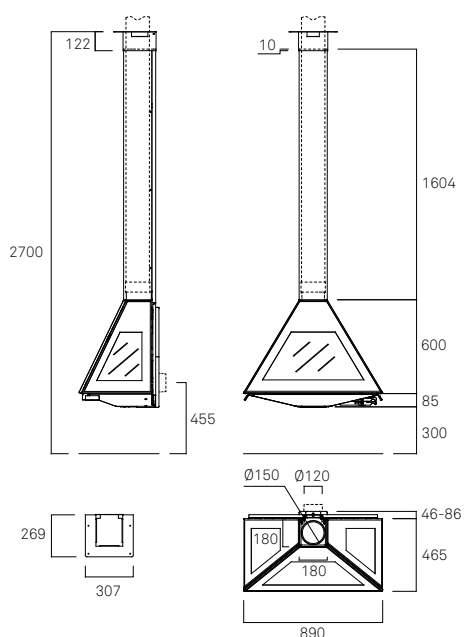

01. DESIGN FREESTANDING STOVES



● D-9



A Ø350
B Ø180
C 300

A4541

Optional round stand.

D-9

For design lovers, the D-9 has an original, elegant shape that suits stylish apartments and rooms.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Preheated primary and secondary air.
Tertiary or safety air.
Optional external air inlet.


Cover pipe.
Vermiculite lining in black.
Steel-coated vermiculite base.
Option EControl automatic combustion control.

More details:
Page 48 - 49

D-9

X1292

η	84 %
$\dot{Q}_{nom}$	9,4 kW
$\dot{Q}_{max}$	6-11 kW
CO	0,08 %
$\dot{m}_{CO}$	27,07 mg/Nm ³
$\dot{m}_{fuel}$	2,4 kg/h
m_{fuel}	150 kg
h_{cm}	33 cm
NOx	57,79 mg/Nm ³
OGC	33,31 mg/Nm ³
UE	UNE EN-13240

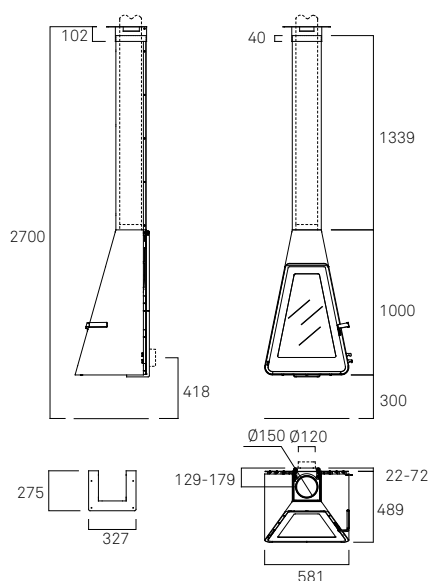

01. DESIGN FREESTANDING STOVES





● D-8

D-7

Its size and looks make the D-7 one of our most popular modern freestanding stoves: it fits in in any contemporary-style home and is outstandingly versatile. A great little freestanding stove.

FEATURES



- Double ventilated hood for hot air.
- Ceiling plate.
- Heat resistant, anti-smoke, anti-odour paint.
- Ember grate and ash pan.
- Preheated primary and secondary air.
- Tertiary or safety air.
- Optional external air inlet.

- Direct smoke pipe
- Vermiculite lining in black.
- Option ECOntrol automatic combustion control.

More details:
Page 48 - 49

D-7
X1280

η	82,5%
 nom	7,7 kW
	5-9 kW
	0,12%
	27,64 mg/Nm³
	2,5 kg/h
	101 kg
	33 cm
NOx	52,02 mg/Nm³
OGC	160,71 mg/Nm³
	UNE EN-13240

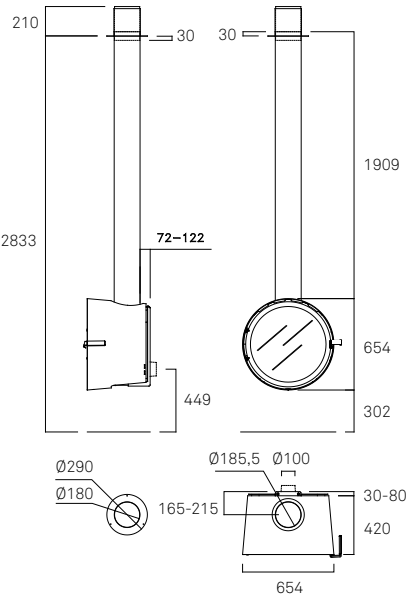

- A** Ø350
- B** Ø180
- C** 300

A4520
Optional round stand.

D-8

Its unusual shape makes it ideal to add an original touch to the modern living room.

FEATURES

Drop-down door.
Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Optional external air inlet.
Direct smoke pipe
Primary and secondary register.



Vermiculite lining in black.
Option EControl automatic combustion control.

More details:
Page 48 - 49

D-8

X1285V6

η	87%
 nom	11,3 kW
	7,5 - 13 kW
	0,080%
	29,72 mg/Nm³
	2,8 kg/h
	180 kg
	45 cm
NOx	97,74 mg/Nm³
OGC	69,60 mg/Nm³
	UNE EN-13240

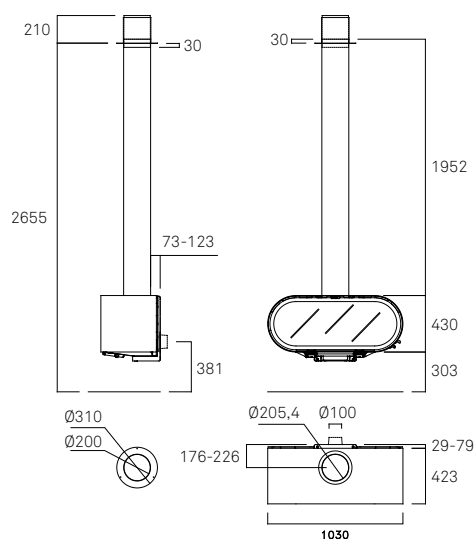

A Ø350
B Ø200
C 300

A4530V6
Optional round stand.

AITANA

An elegant frontal rounded freestanding stove that suits any room. Its classic style fits specially traditional spaces. Two doors opening from the center.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Preheated primary and secondary air.
Tertiary or safety air.
Optional external air inlet.
Ember grate and ash pan removal from the bottom.


Cover pipe.
Vermiculite lining in black.
Option EControl automatic combustion control.

More details:
Page 48 - 49

AITANA

X1150

η	78%
 nom	16,7 kW
	11 - 19 kW
	0,09%
	29 mg/Nm ³
	4,6 kg/h
	214 kg
	35 cm
NOx	97,00 mg/Nm ³
OGC	118,00 mg/Nm ³
	UNE EN-13240

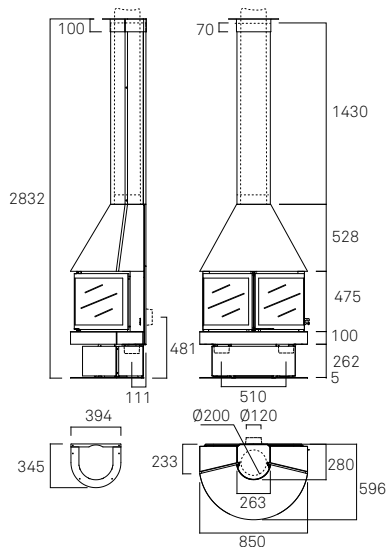



● AITANA

BARBARA 90

This model preserves the charm of traditional fireplaces. Central door opening and lateral doors opening as well.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Preheated primary and secondary air.
Tertiary or safety air.
Optional external air inlet.
Ember grate and ash pan removal from the bottom.

Cover pipe.

Vermiculite lining in black.


Option ECOntrol automatic combustion control.

More details:

Page 48 - 49

BARBARA 90

X1118

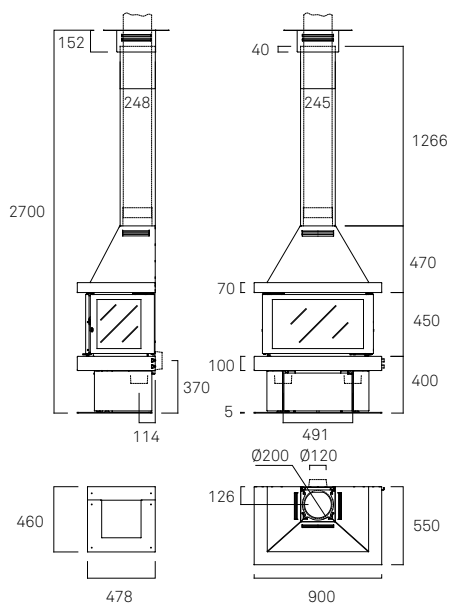

η	80,30%
nom	15,8 kW
flame	10,5 - 18,5 kW
CO	0,10%
mg/Nm^3	26 mg/Nm ³
kg/h	4,1 kg/h
kg	232 kg
cm	40 cm
NOx	110,00 mg/Nm ³
OGC	85,00 mg/Nm ³
UE	UNE EN-13240

A+

AEFECC 7*

Stelle ambientale
★★★★★
DECRETO 2 NOVEMBRE 2011 N. 196





● BARBARA 90

GALA

This impressive central freestanding stove is synonymous with elegance and distinction. The focal point of any living room, it also achieves great energy efficiency. Gala is exclusive.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Ember grate and ash pan removal from the bottom.


Optional external air inlet.
Cover pipe (needs internal smoke pipe).
Preheated primary and secondary air.

More details:
Page 48 - 49

GALA

X1222

	81,1%
	17,5 kW
	12 - 21kW
	0,16%
	- mg/Nm³
	4,7 kg/h
	297 kg
	40 cm
	- mg/Nm³
	- mg/Nm³
	UNE EN-13240

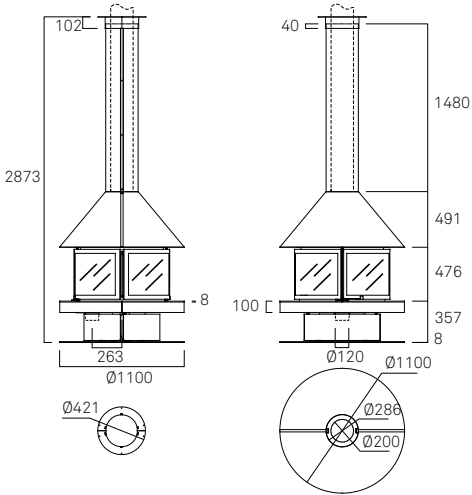

A+



X1222-210 / X1222-215

Option to request in black glass finishing on the upper base and the lower platform base.



● GALA

01. DESIGN FREESTANDING STOVES

GISELLE 90

A central freestanding stove for those who love a real fire and good conversation, Giselle is a great reason to gather around the fire.

FEATURES

- Double ventilated hood for hot air.

Ceiling plate.

Heat resistant, anti-smoke, anti-odour paint.

Ember grate and ash pan removal from the bottom.



Optional external air inlet.
- Cover pipe.

Preheated primary and secondary air.

Four doors with automatic closure on loading door.

More details:
Page 48 - 49

GISELLE 90	
X1273	
η	84%
$\dot{Q}_{nom}$	17,6 kW
$\dot{Q}_{min} - \dot{Q}_{max}$	12 - 21 kW
CO	0,09%
PM_{10}	25 mg/Nm ³
$\dot{m}_{ash}$	4,5 kg/h
m	325 kg
h	40 cm
NOx	- mg/Nm ³
OGC	- mg/Nm ³
UE	UNE EN-13240

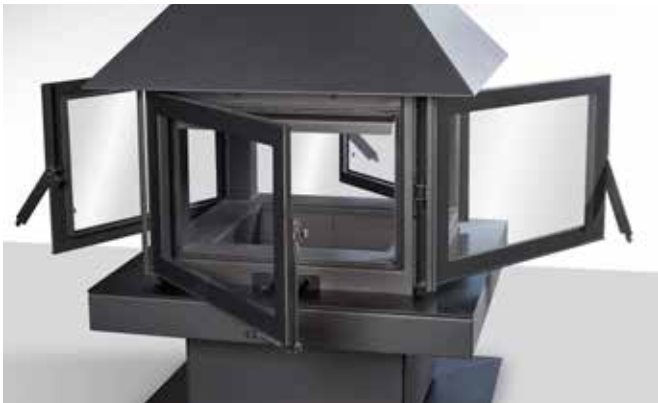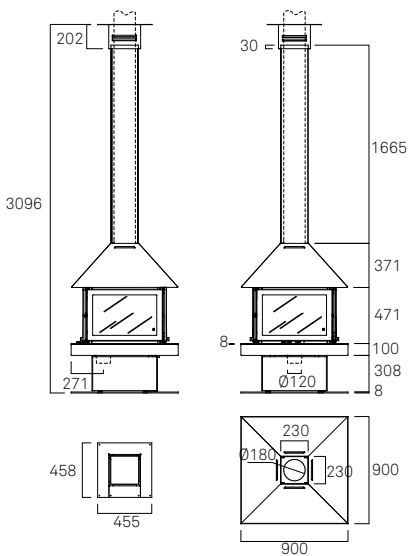



● GISELLE 90



ESTELA

Our straight-sided corner unit, the Estela, is fire brick-lined and has primary and secondary registers.


FEATURES

- Double ventilated hood for hot air.
- Ceiling plate.
- Heat resistant, anti-smoke, anti-odour paint.
- Ember grate and ash pan upper removal.
- Optional external air inlet.
- Preheated primary and secondary air.
- Cover pipe (needs internal smoke pipe)
- Refractory lining.
- Option EControl automatic combustion control.

More details:
Page 48 - 49

ESTELA	
X1043	
	81,8%
	15,7 kW
	10,5 - 18 kW
	0,12%
	- mg/Nm³
	5 kg/h
	217 kg
	40 cm
NOx	- mg/Nm³
OGC	- mg/Nm³
	UNE EN-13240

A+

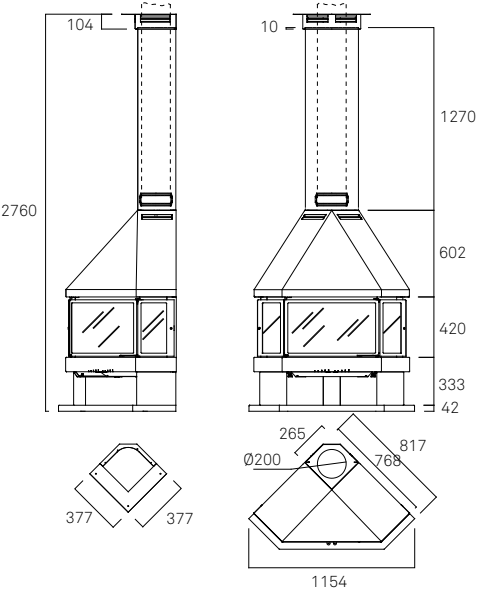



● ESTELA

01. DESIGN FREESTANDING STOVES

General features



Ceiling plate.




Ceiling attachment for flue cover.



Glass-ceramic glass.



External air inlet.
Guarantees that the air in the house is healthier. Does not interfere with domestic air extraction devices, such as those in the kitchen and bathroom.



Combustion chamber (back): external air inlet and combustion air preheating.



Tertiary or safety air.
Makes an extra contribution of oxygen that enables the combustion gases to burn better.



Primary and secondary register.
Provides oxygen for the lower and upper part of the glass.



Ember grate and ash pan.

Born
Vertex
Drop

D-7



Cover pipe.



Direct smoke pipe



Ember grate and ash pan removal from below.

Barbara-90
Aitana
Gisele 90
Gala

Estela (upper removal)



Vermiculite lining in black.


In all the models




Refractory lining.

In Estela model


Custom adaptations




Additional finished flue




Finished flue corner piece




Sloped trim



Special trim




Additional cover pipe



Cover pipe corner piece



Sloped trim







Special trim

For other modifications please ask to our technics.





Angle options

Options for frontal model




* Trim may slope in two directions and not match any of the examples. Please enquire about special cases.

Options for corner model




Measuring the pitch angle

Using spirit level

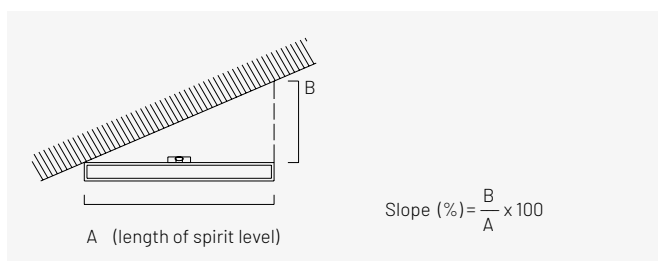


Using a tape measure

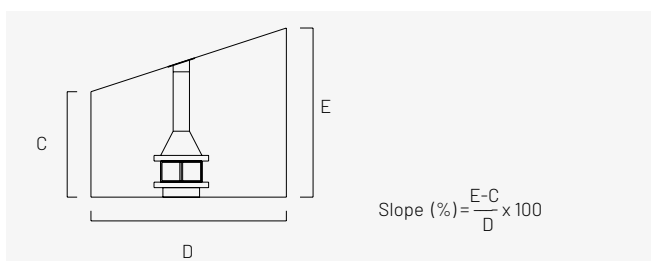


Measuring the height

Frontal fireplace

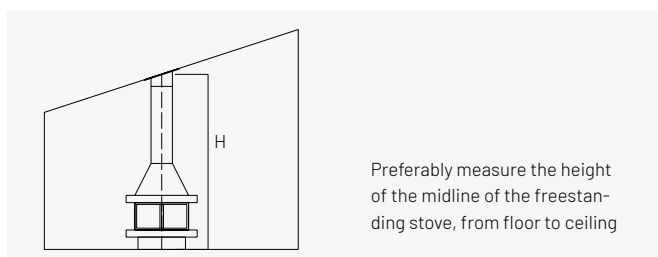

Corner fireplace



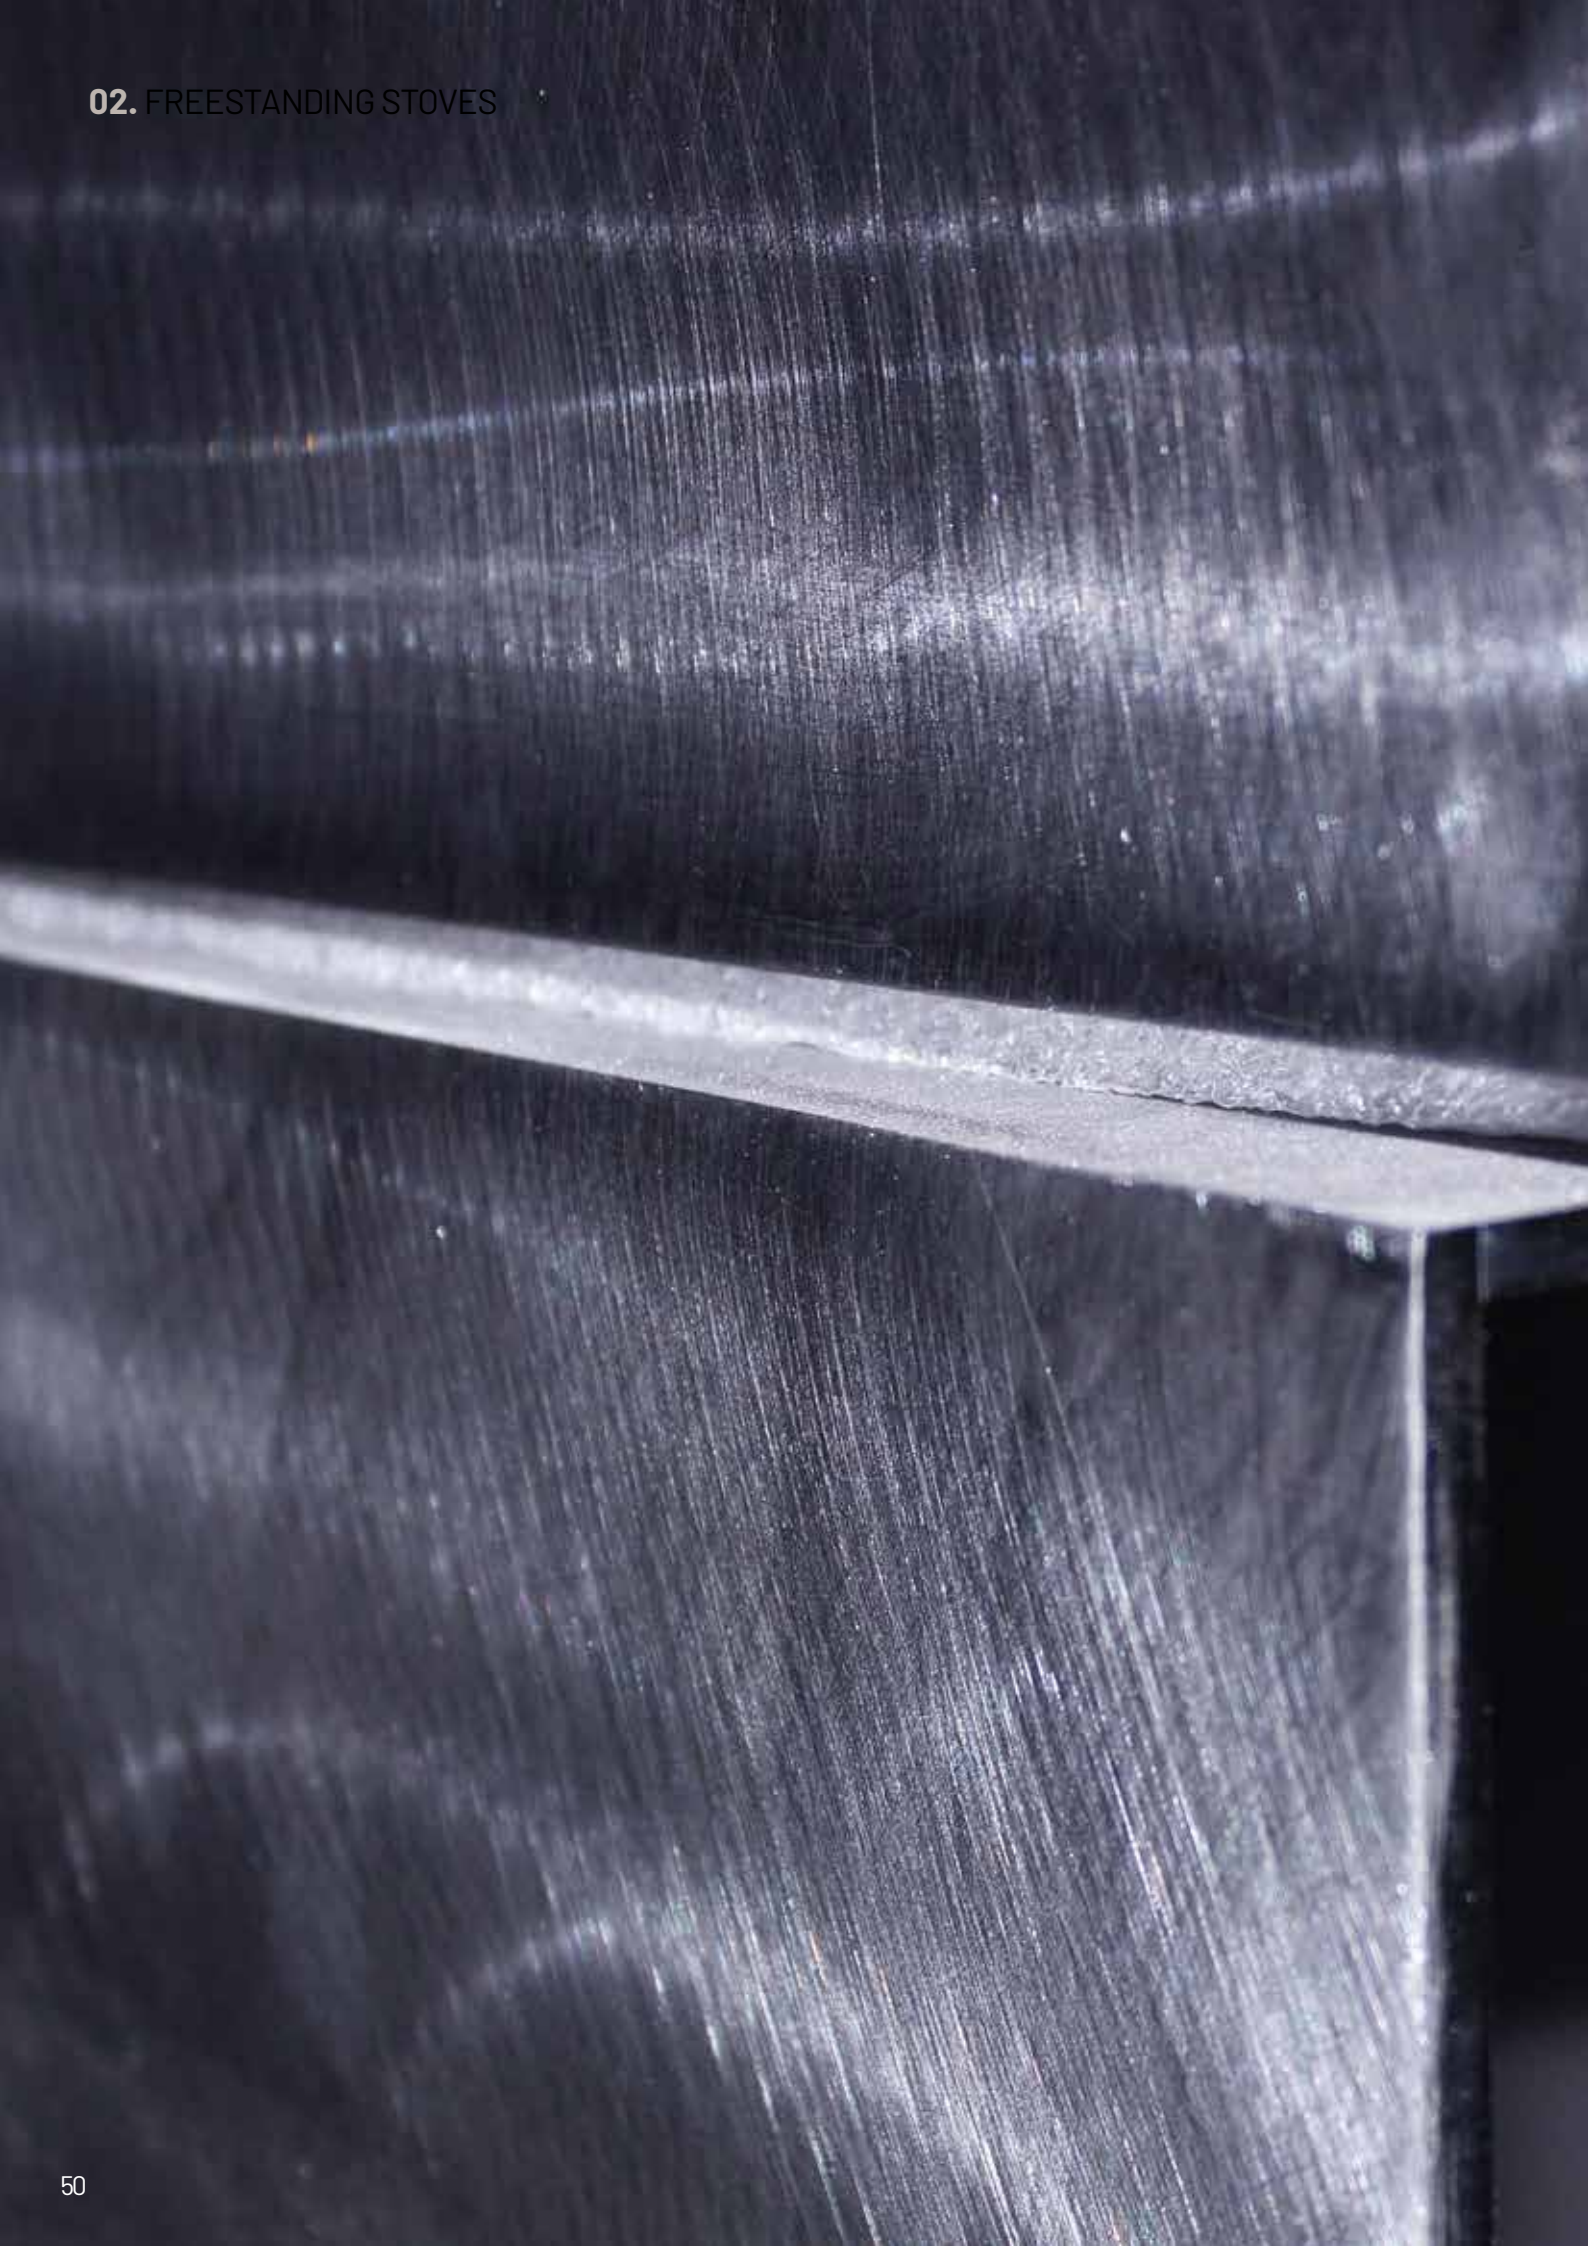

02.

FREESTANDING STOVES

With the new Habit range you can personalise your stove as much as you want. From our basic designs, you can choose between different sizes, formats, fire windows and fans systems for maximum efficiency.

Also available with lower wood store, metal bench unit and wall-mounting version.

Also in this section, take a look at our Hebar model, a stove-oven-barbecue unit that's a heater and a cooker all in one.

02. FREESTANDING STOVES





● Habit 70 A + T With wood store

02. FREESTANDING STOVES

Habit +T

FEATURES

Reversible front door.
Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or security air.
Ash pan removal from the front.
Double deflector, top deflector with two-position adjustable flow.
Option EControl automatic combustion control.
Two or four fans unit with two automatic speed settings and one manual.

Can be supplied without fans unit on request.

More details: Page 110

	Habit 70A +T	Habit 80 +T	Habit 100 +T
	E2110+T	E2120+T	E2130+T
	85,30%	85,30%	79,57%
	8,8 kW	9 kW	11,2 kW
	5,5-9,5 kW	6,5-11,5 kW	7,5-13 kW
	0,06%	0,06%	0,09%
	22,9 mg/Nm ³	22,9 mg/Nm ³	31 mg/Nm ³
	2,4 kg/h	2,8 kg/h	3,2 kg/h
	161 kg	188 kg	221 kg
	45 cm	50 cm	60 cm
NOx	106 mg/Nm ³	106 mg/Nm ³	97 mg/Nm ³
OGC	51 mg/Nm ³	51 mg/Nm ³	92 mg/Nm ³
	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335

A+

AEFECC 7*

Stelle ambientale
★★★★★
DECRETO 7 NOVEMBRE 2017 N. 186

CONTO TERMICO

A+

AEFECC 7*

Stelle ambientale
★★★★★
DECRETO 7 NOVEMBRE 2017 N. 186

CONTO TERMICO


A

AEFECC 7*

Stelle ambientale
★★★★★
DECRETO 7 NOVEMBRE 2017 N. 186


CONTO TERMICO

Habit 70 A +T




2 fans unit with 2 automatic speed settings and 1 manual.

Habit 80 +T / Habit 100 +T



4 fans unit with 2 automatic speed settings and 1 manual.

OPTIONAL ITEMS

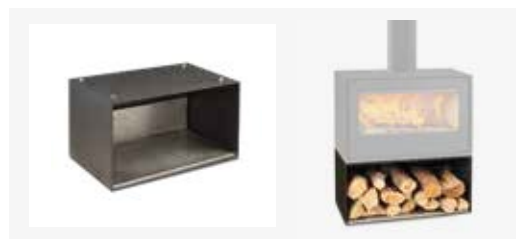

Wood store.

E2110-2 Wood store Habit 70 A +T (686x400x410 mm)

E2120-2 Wood store Habit 80 +T (780x400x430 mm)

E2130-2 Wood store Habit 100 +T (980x400x430 mm)



Wall mounting kit.

E2110-1 Wall mounting kit Habit 70 A +T

E2120-1 Wall mounting kit Habit 80 +T

E2130-1 Wall mounting kit Habit 100 +T






Bench unit.

E2190 Bench unit 1000 mm (1000x400x450 mm)

E2192 Bench unit 1200 mm (1200x400x450 mm)

E2194 Bench unit 1400 mm (1400x400x450 mm)

E2196 Bench unit 1600 mm (1600x400x450 mm)

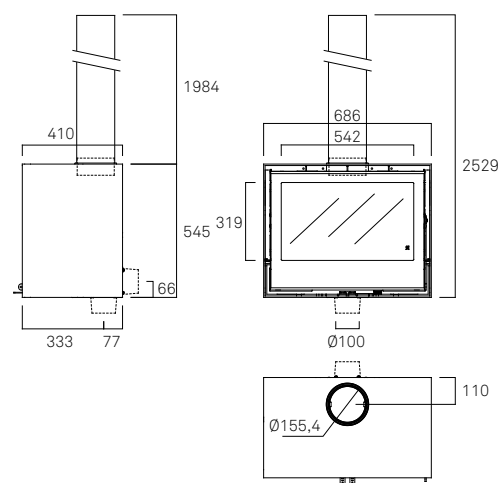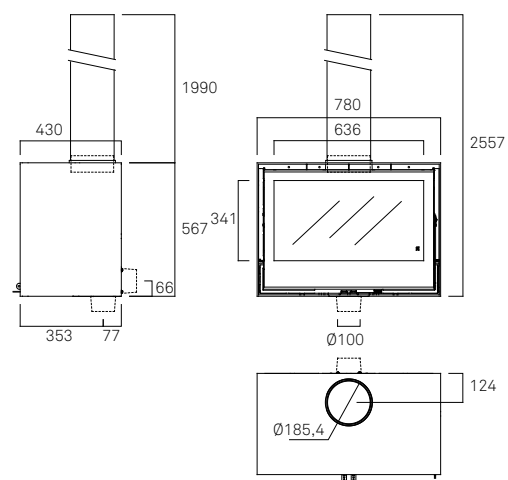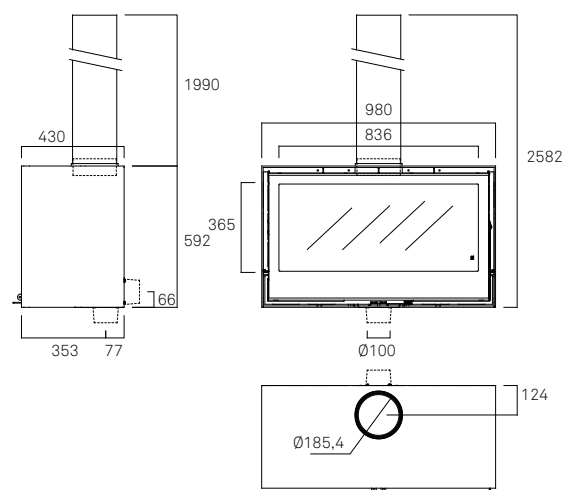**Habit 70 A +T****Habit 80 +T****Habit 100 +T**

02. FREESTANDING STOVES

Habit V +T

FEATURES


Reversible front door.
Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or security air.
Ash pan removal from the front.
Double deflector, top deflector with two-position adjustable flow.
Option EControl automatic combustion control.
Two fans unit with two automatic speed settings and one manual.
Except Habit 40V (without fans).

Can be supplied without fans unit on request.

More details: Page 110




Habit 40 V

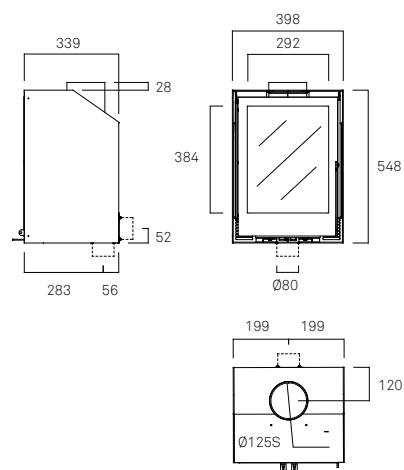

	Habit 40 V	Habit 50V +T
	M5974	E2100+T
	84,00%	86,30%
	4,5 kW	8,7 kW
	3-5,5 kW	5,5-9,5 kW
	0,10%	0,048%
	- mg/Nm³	13 mg/Nm³
	1,3 kg/h	2,3 kg/h
	75,6 kg	155 kg
	25 cm	33 cm
NOx	- mg/Nm³	102,00 mg/Nm³
OGC	- mg/Nm³	51 mg/Nm³
	UNE EN-13229	UNE EN-13229 UNE EN-60335
	A+	A



Habit 50 V +T

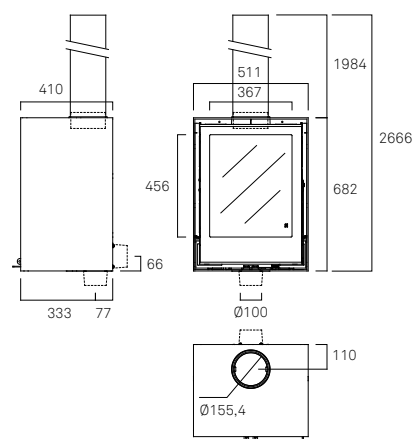

OPTIONAL ITEMS



Wood store.

E2100-2 Wood store Habit 50 V +T
(511x400x410 mm)



Wall mounting kit.

E2100-1 Wall mounting kit Habit 50 V +T



Bench unit. (50V +T/ 40V)

E2190 Bench unit 1000 mm (1000x400x450 mm)
E2192 Bench unit 1200 mm (1200x400x450 mm)
E2194 Bench unit 1400 mm (1400x400x450 mm)
E2196 Bench unit 1600 mm (1600x400x450 mm)



● Habit 40 V



● Habit 50 V +T With wood store


02. FREESTANDING STOVES



● Habit 93 TC +T With wall mounting kit



Habit 93 TC +T

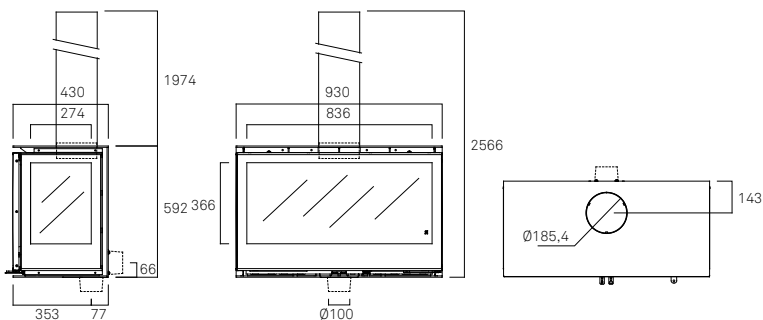

Habit TC +T

FEATURES

Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from front.
Double deflector, top deflector with two-position adjustable flow.
Option EControl automatic combustion control.
Two or four fans unit with two automatic speed settings and one manual.

Can be supplied without fans unit on request.

More details: Page 110

	Habit 73 TC +T E2140+T	Habit 93 TC +T E2145+T
η	85,01%	81%
 nom	11,1 kW	14,4 kW
	7,5-13 kW	10-17,5 kW
	0,09%	0,15%
	38,76 mg/Nm ³	23,59 mg/Nm ³
	2,8 kg/h	3,8 kg/h
	176 kg	197 kg
	45 cm	60 cm
NOx	71,5 mg/Nm ³	51,36 mg/Nm ³
OGC	36,69 mg/Nm ³	90,45 mg/Nm ³
	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335

A+

AEFECC | 7*

Stelle ambientale
★★★★★
DIRETTORE 7 NOVEMBRE 2012 N. 468


CONTO TERMICO

A+

AEFECC | 6*



OPTIONAL ITEMS

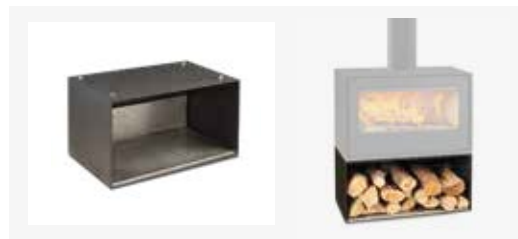

Wood store.

E2140-2 Wood store Habit 73 TC +T (730x400x430 mm)

E2145-2 Wood store Habit 93 TC +T (930x400x430 mm)



Wall mounting kit.

E2120-1 Wall mounting kit Habit 73 TC +T

E2130-1 Wall mounting kit Habit 93 TC +T



Bench unit.


E2190 Bench unit 1000 mm (1000x400x450 mm)

E2192 Bench unit 1200 mm (1200x400x450 mm)

E2194 Bench unit 1400 mm (1400x400x450 mm)

E2196 Bench unit 1600 mm (1600x400x450 mm)

Habit 73 TC +T

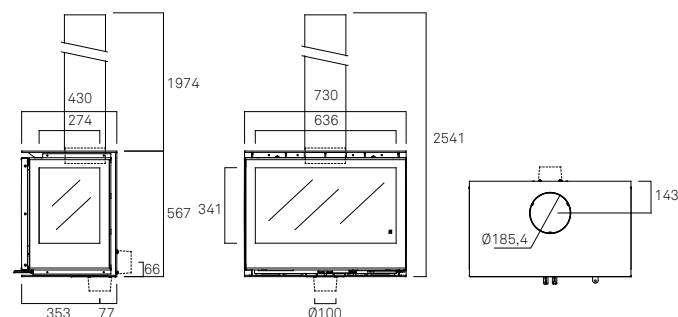

02. FREESTANDING STOVES

Habit LD/LI +T


FEATURES

Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from front.
Double deflector, top deflector with two-position adjustable flow.
Option EControl automatic combustion control.
Two fans unit with two automatic speed settings and one manual.

Can be supplied without fans unit on request.

More details: Page 110

OPTIONAL ITEMS

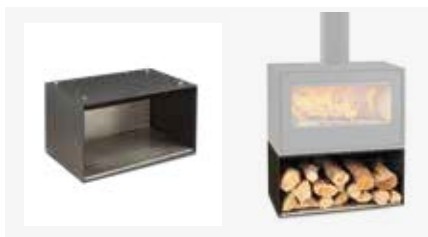

Wood store.

E2150-2 Wood store 76 LD/LI +T
(755x400x430 mm)

It only allows the external air inlet through the connector on the back.



Wall mounting kit.

E2120-1 Wall mounting kit Habit 76 LD/LI +T




Bench unit.


E2190 Bench unit 1000 mm (1000x400x450 mm)
E2192 Bench unit 1200 mm (1200x400x450 mm)
E2194 Bench unit 1400 mm (1400x400x450 mm)
E2196 Bench unit 1600 mm (1600x400x450 mm)



Habit 76 LD +T

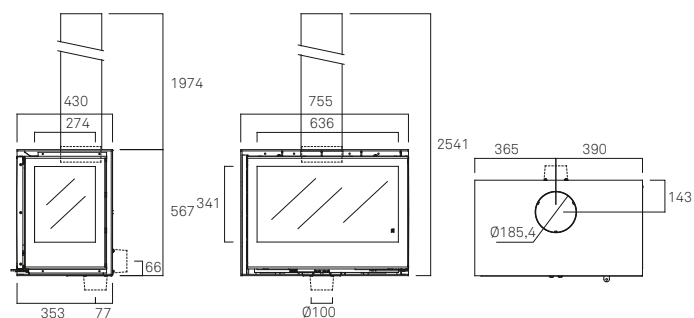

Habit 76 LI +T

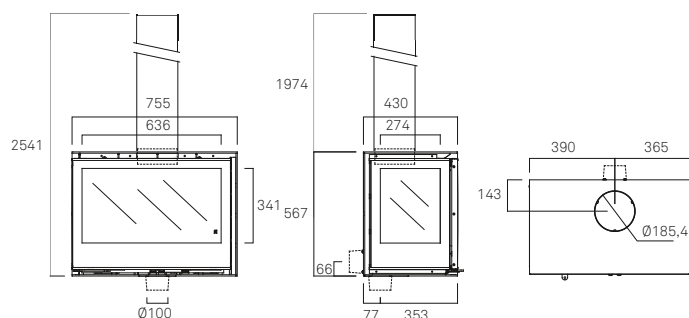

Habit 76 LD +T
E2150+T

η	77,3%
nom	9,4 kW
kg/h	6,5-11 kW
CO	0,08%
kg/h	16,4 mg/Nm ³
kg	2,8 kg/h
cm	176 kg
NOx	40 cm
OGC	104 mg/Nm ³
UNE EN-13229	66 mg/Nm ³
UNE EN-60335	UNE EN-13229 UNE EN-60335

A

AEFECC 7★

Stelle ambientale
★★★★★
DECRETO 4 NOVEMBRE 2011 N. 186



● Habit 76 LI +T With bench

02. FREESTANDING STOVES



● Habit 80 DC +T With bench


FEATURES

Reversible doors.
Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Please ask about the option of external air inlet.
Preheated primary and secondary air.
Double deflector, lower deflector with

two-position adjustable flow.
Steel-coated vermiculite base.

More details: Page 110

OPTIONAL ITEMS

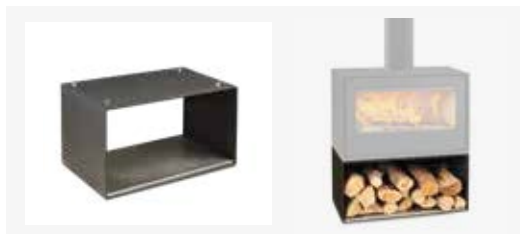

Wood store.

E2170-2 Wood store Habit 80 DC +T (785x400x440 mm)

E2175-2 Wood store Habit 100 DC +T (985x400x440 mm)

It does not allow external air inlet.



Bench unit.

E2190 Bench unit 1000 mm (1000x400x450 mm)

E2192 Bench unit 1200 mm (1200x400x450 mm)

E2194 Bench unit 1400 mm (1400x400x450 mm)

E2196 Bench unit 1600 mm (1600x400x450 mm)

	Habit 80 DC +T E2170+T	Habit 100 DC +T E2175+T
η	85,7 %	75,90%
 nom	12,4 kW	13,4 kW
	8,5 - 14,5 kW	9-16 kW
	0,107%	0,101%
	34,00 mg/Nm ³	16,3 mg/Nm ³
	3,55 kg/h	4 kg/h
	193 kg	229 kg
	40 cm	60 cm
NOx	108,00 mg/Nm ³	102 mg/Nm ³
OGC	141,00 mg/Nm ³	81 mg/Nm ³



UNE EN-13229

UNE EN-13229

A+

AEFECC | 7*

Stelle ambientale
★★★★★
DECRETI 7 NOVEMBRE 2011 AL 196

CONTO TERMICO


A

AEFECC | 7*


Stelle ambientale
★★★★★
DECRETI 7 NOVEMBRE 2011 AL 196



Habit 80 DC +T

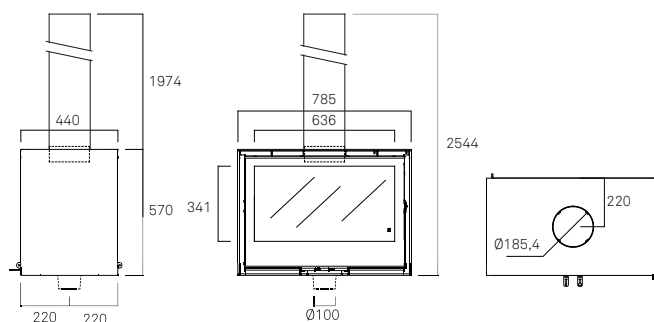

Habit 100 DC +T

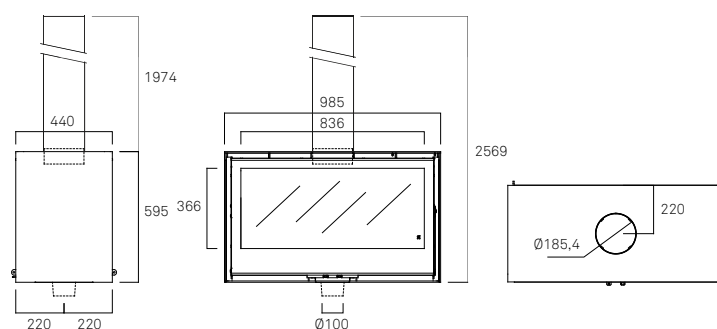

02. FREESTANDING STOVES





● Hebar

Hebar

Hebar is one of the most complete and efficient products on the market and thanks to its high efficiency, it also has the ability to heat a large area. The same inertia of the stove keeps the heat for cooking in the oven until about 3 hours after the last loading.

STOVE FEATURES:

- Optional external air inlet.
- Preheated primary and secondary air.
- Tertiary or safety air.
- Front ash removal.
- Bottom hinged door allows depositing the grid and avoid soiling.
- Supports ECOntrol automatic combustion control.

OVEN FEATURES:

- Vitrified steel Oven.
- Steel grill and vitrified steel plate.
- Capacity: 78 litres
- Thermometer included

BARBECUE FEATURES:

- Stainless steel grill


More details: Page 48



Hebar

E3000

η	81,40%
 nom	12,21 kW
	8,5-14,5 kW
	0,11%
	25,38 mg/Nm³
	3,4 kg/h
	254 kg
	45 cm
NOx	64,48 mg/Nm³
OGC	75,87 mg/Nm³
	UNE EN-13240

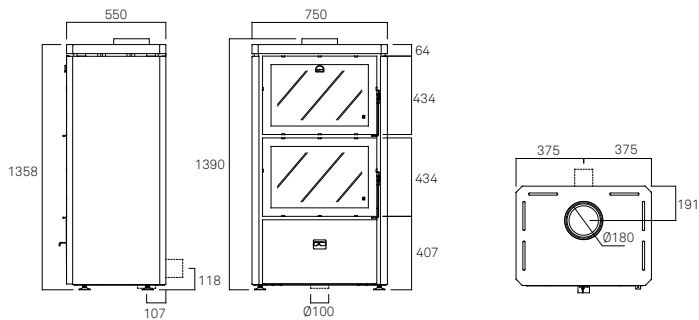





03.

FIREBOXES

G series

Our G series Built in inserts epitomise all of Rocal's values in a single product: efficiency, quality, design, comfort and safety.

The exclusive fireboxes in this series are a distinguishing feature in your home. They offer a complete view of the fire and can be finished with the cladding of your choice.

03. FIREBOXES





● G300

G300/350/400 G300/350/400 + plus

FEATURES

Vertical sliding and drop-down door.
Steel combustion chamber.
Vermiculite inner lining with refractory base.
Wraparound casing with optional hot air conduction.
Optional external air intake.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from above or below.
Double deflector: three-position superior deflector for adjustable flow.

OPTIONAL ITEMS

A 2080 ventilation unit
4-cm frame.
10-cm frame.
EControl automatic combustion control.

FITTING ACCESSORIES


Inlet/outlet diffuser vents.
Diffuser vent with hinged inlet
Wood store.

More details: Pages 86 - 89




	G300 M1810	G300 M1810 +Plus 180 C4060	G350 M1820	G350 M1820 +Plus 200 C4070	G400 M1830	G400 M1830 +Plus 250 C4080
	81 %	87,90 %	78%	85,10 %	78%	85,10 %
	11,5 kW	10,6 kW	13 kW	11,7 kW	16,5 kW	11,7 kW
	7 - 13 kW	7 - 13 kW	8 - 15 kW	8 - 15 kW	10 - 19 kW	10 - 19 kW
	0,08%	0,041%	0,10%	0,082%	0,10%	0,082%
	20,47 mg/Nm ³	16,6 mg/Nm ³	28,82 mg/Nm ³	20 mg/Nm ³	28,82 mg/Nm ³	20 mg/Nm ³
	3,15 kg/h	2,7 kg/h	3,5 kg/h	3 kg/h	4,6 kg/h	4 kg/h
	232 kg	250 kg	267 kg	290 kg	313 kg	290 kg
	45 cm	45 cm	50 cm	50 cm	55 cm	50 cm
NOx	74,22 mg/Nm ³	95 mg/Nm ³	74,22 mg/Nm ³	104 mg/Nm ³	66,98 mg/Nm ³	104 mg/Nm ³
OGC	30,29 mg/Nm ³	34,7 mg/Nm ³	56,96 mg/Nm ³	49 mg/Nm ³	56,96 mg/Nm ³	49 mg/Nm ³
	UNE EN-13229	UNE EN-13229	UNE EN-13229	UNE EN-13229	UNE EN-13229	UNE EN-13229
	A+	A+	A	A+	A	A+
	AEFECC 7*	AEFECC 7*	AEFECC 7*	AEFECC 7*	AEFECC 7*	AEFECC 7*
	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186
	CONTO TERMICO	CONTO TERMICO		CONTO TERMICO		CONTO TERMICO



+Plus

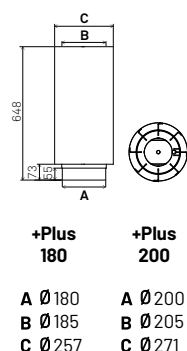

Ash pan removal from below.

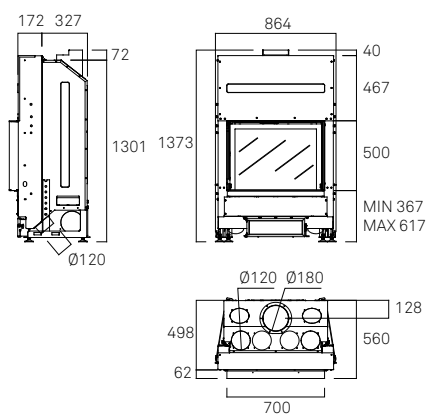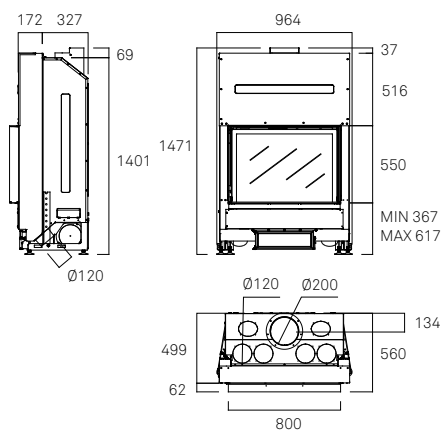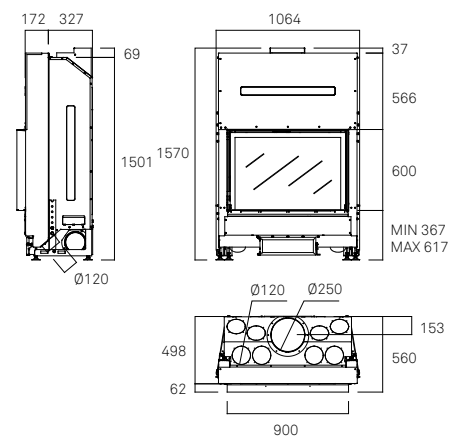**G300****G350****G400**

- Vertical sliding and drop-down door.
- Steel combustion chamber.
- Vermiculite inner lining with refractory base.
- Wraparound casing with optional hot air conduction.
- Optional external air intake.
- Preheated primary and secondary air.
- Tertiary or safety air.
- Ash pan removal from above or below.
- Double deflector: three-position superior deflector for adjustable flow.

A 2080 ventilation unit
4-cm frame.
10-cm frame.
EControl automatic combustion control.

Inlet/outlet diffuser vents.
Diffuser vent with hinged inlet
Wood store.

	G425 M1835	G425 M1835 +Plus 180 C4060	G450 M1840	G450 M1840 +Plus 200 C4070	G500 M1850	G500 M1850 +Plus 250 C4080
	78%	85,10 %	78%	85,10 %	78%	85,10 %
	13 kW	11,7 kW	15 kW	13,5 kW	16 kW	14,4 kW
	8 - 15 kW	8 - 15 kW	10 - 17 kW	10 - 17 kW	10 - 18 kW	10 - 18 kW
	0,10 %	0,082%	0,10 %	0,082%	0,10 %	0,082%
	28,82 mg/Nm³	20 mg/Nm³	28,82 mg/Nm³	20 mg/Nm³	28,82 mg/Nm³	20 mg/Nm³
	3,5 kg/h	3 kg/h	4,2 kg/h	3,6 kg/h	4,4 kg/h	4,4 kg/h
	240 kg	258 kg	254 kg	277 kg	306 kg	333 kg
	50 cm	50 cm	55 cm	55 cm	65 cm	65 cm
NOx	74,22 mg/Nm³	104 mg/Nm³	74,22 mg/Nm³	104 mg/Nm³	74,22 mg/Nm³	104 mg/Nm³
OGC	56,96 mg/Nm³	49 mg/Nm³	56,96 mg/Nm³	49 mg/Nm³	56,96 mg/Nm³	49 mg/Nm³
	UNE EN-13229	UNE EN-13229	UNE EN-13229	UNE EN-13229	UNE EN-13229	UNE EN-13229
						
						
						
						

G500






Ash pan removal from below.



+Plus



+Plus 180	+Plus 200	+Plus 250
A Ø 180	A Ø 200	A Ø 250
B Ø 185	B Ø 205	B Ø 255
C Ø 257	C Ø 271	C Ø 321



G450

03. FIREBOXES



● G505

G505

FEATURES

Corner.
Vertical sliding and drop-down door.
Steel combustion chamber.
Vermiculite inner lining with refractory base.
Wraparound casing with optional hot air conduction.
Optional external air intake.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from above or below.
Double deflector: three-position superior deflector for adjustable flow.

OPTIONAL ITEMS

A 2080 ventilation unit
4-cm frame.
10-cm frame.
EControl automatic combustion control.

FITTING ACCESSORIES

Inlet/outlet diffuser vents.
Diffuser vent with hinged inlet
Wood store.

Pages 86 - 89

G505

M1855

η	85,40%
nom	12,9 kW
kg/h	8 - 15 kW
CO	0,090%
mg/Nm^3	11,71
kg/h	3,75
kg	342
cm	50
NOx	70,44 mg/Nm ³
OGC	53,48 mg/Nm ³
UNE	UNE EN-13229

A+


AEFECC 7*

Stelle ambientale
DESIGNATO 7 NOVEMBRE 2017 N. 160

CONTO TERMICO



G505

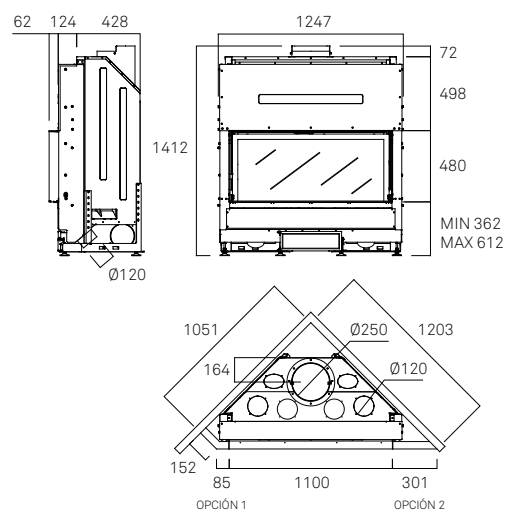

03. FIREBOXES

G450 DC

FEATURES

Double-sided fireplace, one side with a sliding and drop-down door, and the other side with a drop-down door for cleaning the glass.
Steel combustion chamber.
Vermiculite inner lining and refractory base.
Wraparound casing with optional hot air conduction.
Optional external air intake.
Preheated primary and secondary air.
Tertiary air.
Ash pan removal from above or below.
Three deflectors, two of which are fixed, while the third is adjustable depending on the decompression of the duct.

OPTIONAL ITEMS

4-cm frame.
10-cm frame.
ECOntrol automatic combustion control.

FITTING ACCESSORIES

Inlet/outlet diffuser vents.
Diffuser vent with hinged inlet
Wood store.

Pages 86 - 89

G450 DC


M1841

η	82,00%	A+
 nom	14,8 kW	
	10 - 17,5 kW	
	0,120%	
	28,47 mg/Nm³	
	4 kg/h	
	325 kg	
	55 cm	
NOx	91,11 mg/Nm³	
OGC	71,88 mg/Nm³	
	UNE EN-13229	

* Results in certification process. Consult your dealer for more information



G450 DC

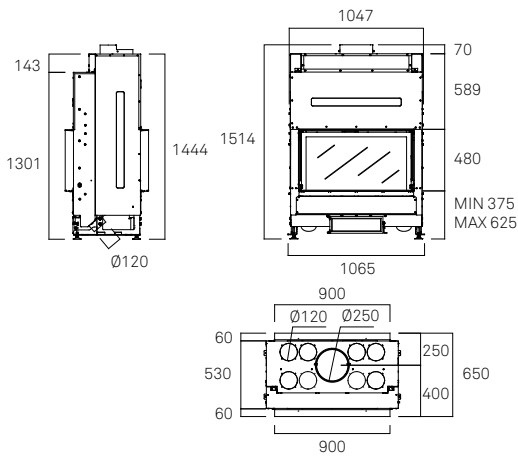



● G450 DC

03. FIREBOXES





● G300 LD with optional frame 4-cm

03. FIREBOXES

G300 LD/LI G300 LD/LI + plus G450 LD/LI

FEATURES

- Side-opening sliding door with two panels (to more easily clean the glass).
- Steel combustion chamber.
- Vermiculite inner lining and refractory base.
- Wraparound casing with optional hot air conduction.
- Primary and secondary combustion air.
- Ash pan removal from above or below.
- Optional external air intake.
- Preheated primary and secondary air.
- Tertiary and/or back-up air.
- Double deflector: three-position superior deflector for adjustable flow.

OPTIONAL ITEMS

- A 2075 ventilation unit.
- 4-cm frame.
- ECOControl automatic combustion control.

FITTING ACCESSORIES


- Inlet/outlet diffuser vents.
- Wood store.

More details: Pages 86 - 89

	G300 LD M1812	G300 LI M1813	G300 LD M1812 + Plus 200	G300 LI M1813 + Plus 200	G450 LD M1842	G450 LI M1843
	86,98%		86,83%		75 %	
 nom	14,4 kW		14,3 kW		14,68 kW	
	10 - 17 kW		10 - 17 kW		10-17,5 kW	
	0,08 %		0,08 %		0,08%	
	31,15 mg/Nm ³		19,76 mg/Nm ³		40 mg/Nm ³	
 kg/h	3,4 kg/h		3,4 kg/h		4,1 kg/h	
 kg	306 kg		368 kg		345 kg	
 cm	45 cm		45 cm		55 cm	
NOx	35,78 mg/Nm ³		51,22 mg/Nm ³		106,25 mg/Nm ³	
OGC	49,36 mg/Nm ³		52,05 mg/Nm ³		54,44 mg/Nm ³	
	UNE EN-13229		UNE EN-13229		UNE EN-13229	
A+  AEFECC 7★ Stelle ambientale ★★★★☆ OGGETTO 1 NOVEMBRE 2017 N. 156 CONTO TERMICO  A+  AEFECC 7★ Stelle ambientale ★★★★☆ OGGETTO 1 NOVEMBRE 2017 N. 156 CONTO TERMICO  A  AEFECC 7★ Stelle ambientale ★★★★☆ OGGETTO 1 NOVEMBRE 2017 N. 156 CONTO TERMICO 						







+Plus



+Plus
200

- A Ø 200
- B Ø 205
- C Ø 271

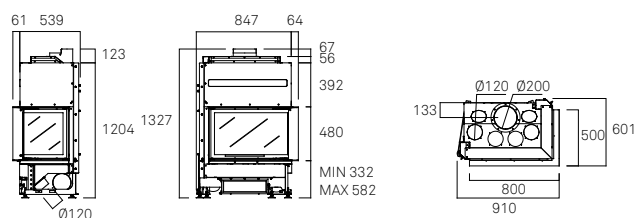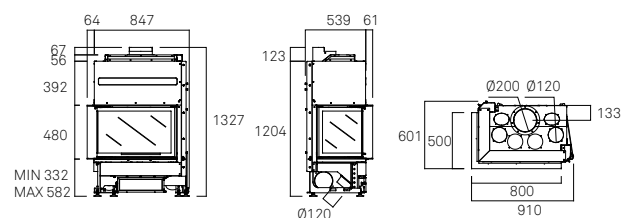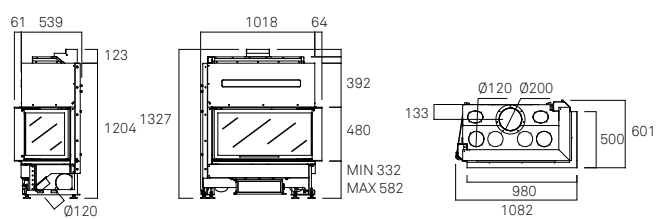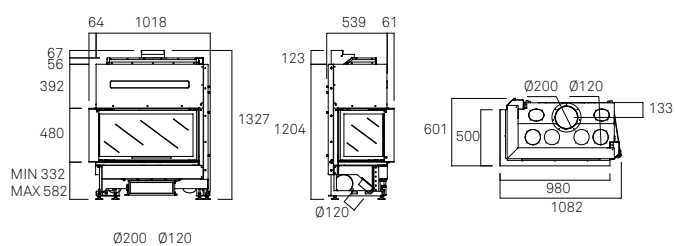**G300 LD****G300 LI****G450 LD****G450 LI**

03. FIREBOXES





● G450 LD

General features




Vermiculite inner lining and refractory base.



Adjustable, levelling stand.



Sliding and drop down door (for glass cleaning).

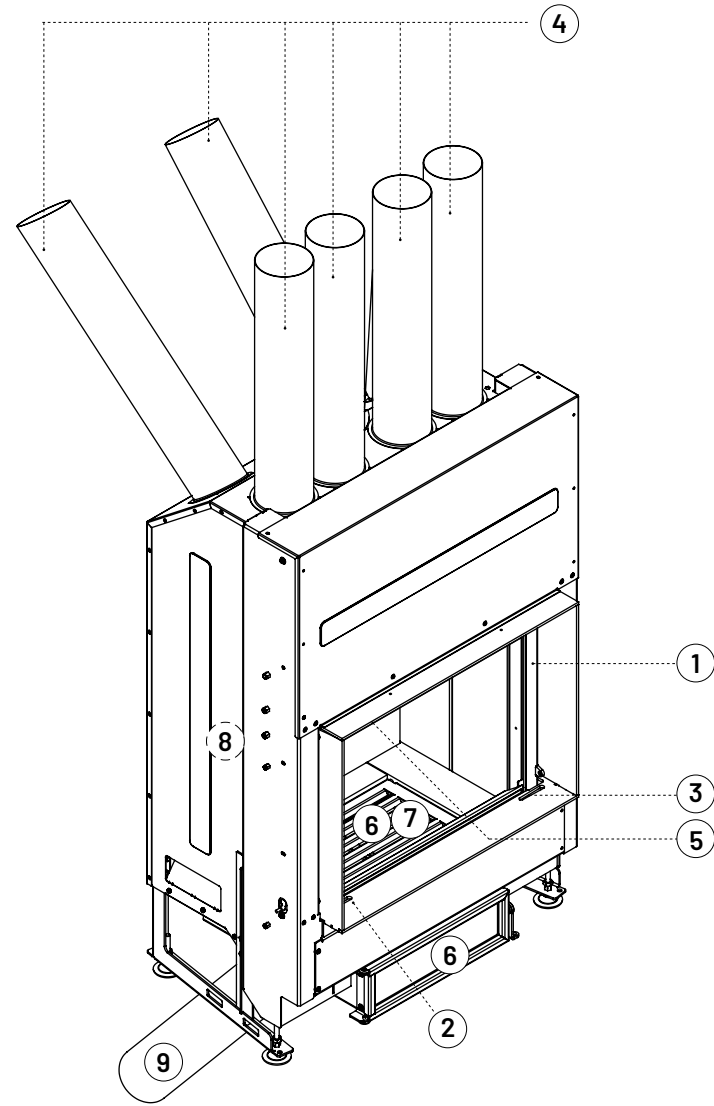

Primary control. Mechanism that provides oxygen for combustion through the fire grille.




Wraparound casing with optional hot air conduction. Conducts the hot air to the room itself or other rooms in the house.



Ash pan removal from above.



Secondary control. Mechanism that provides oxygen for combustion, by means of double combustion and the upper part of the glass.



Tertiary or safety air. Makes an extra contribution of oxygen that enables the combustion gases to burn better.



Steel combustion chamber. The high robustness of the combustion chamber ensures the long life of these devices.



Air inlet for the fan to duct (right or left)



Ash pan removal from above or below.



External air inlet. Guarantees that the air in the house is healthier. Does not interfere with domestic air extraction devices, such as those in the kitchen and bathroom.

Optional items

VENTILATION KITS:

Ventilation kits increase the performance of the device and, when hot air is channelled, they distribute the air better to other parts of the house.




A2082 Ventilation kit with a 680 m³/h tangential turbine. Thermostat and flow regulator with speed settings. (For all models except G450DC)



ECOnrol for models.
More information on page 134

DECORATIVE FRAME 4cm and 10cm:

Option to finish the final appearance of the insert by adding a frame.

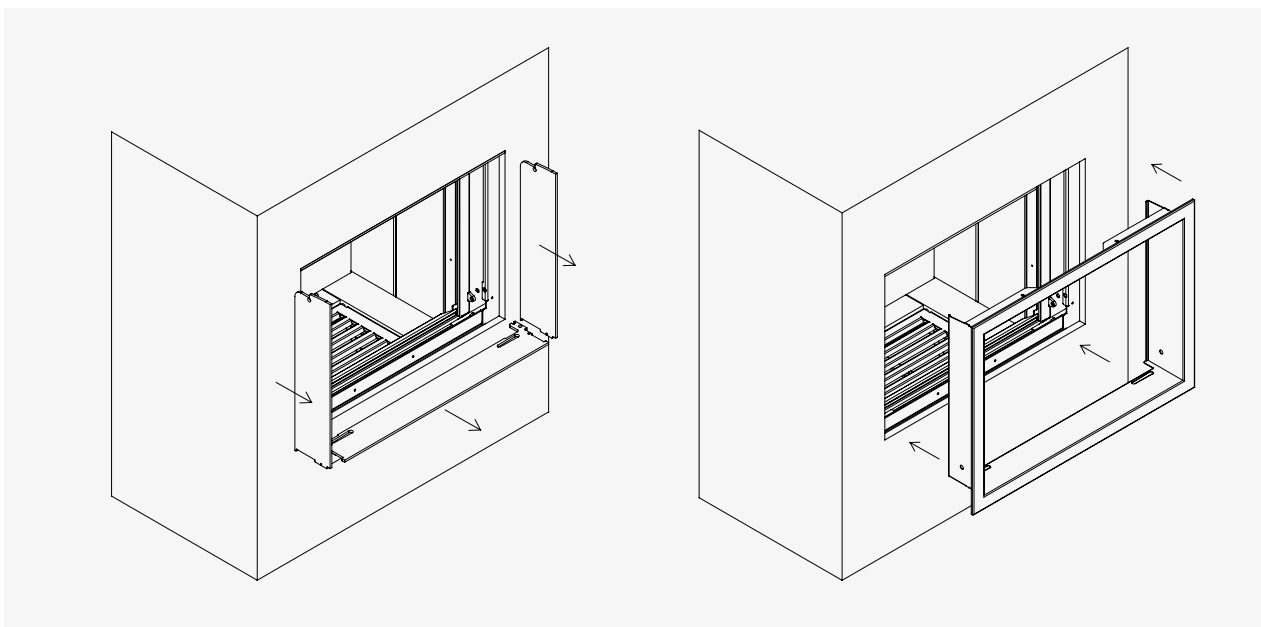

4-cm frame (optional).

10-cm frame (optional) Except G300 LD/ LI, G450 LD/ LI.




Fitting accessories

Our range of fitting accessories makes home installation easier and helps you achieve the right look.


DIFFUSER VENTS

With the aim of providing solutions when inserts and fireplaces are fitted in completed buildings, we have created a range of diffuser vents that ensure proper convection-air inlet and outlet, i.e. the proper venting of the hearth, and help to integrate these components, which can be difficult to add..


C4000 Diffuser vent with hinged inlet

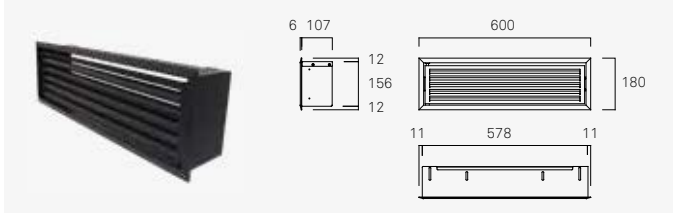


D0000 Single air inlet diffuser vent

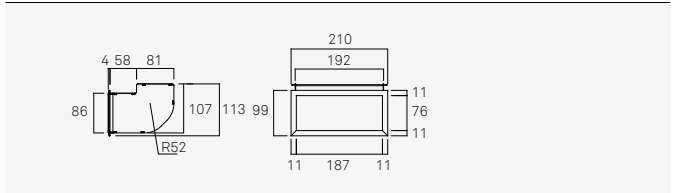


D1000 Single air outlet diffuser vent

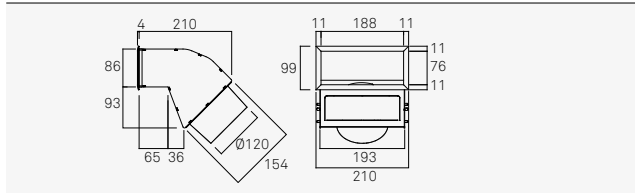


D0002 Single air inlet diffuser vent

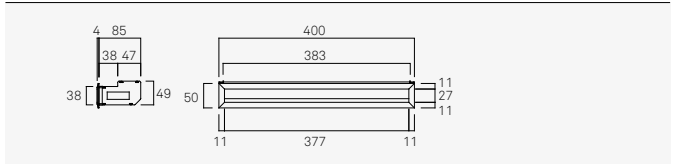


D1002 Single air outlet diffuser vent

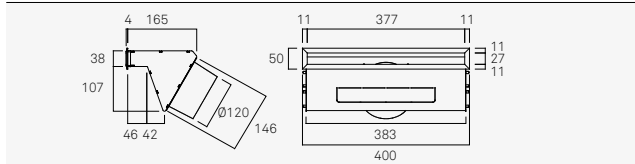


D0005 Double air inlet diffuser vent

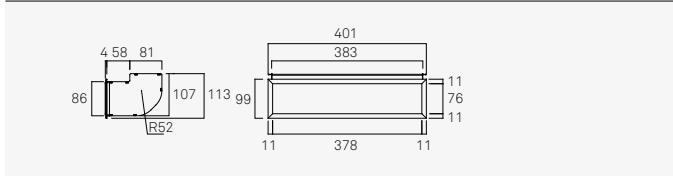


D1005 Double air outlet diffuser vent

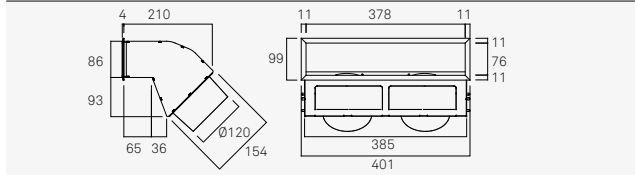


D0007 Double air inlet diffuser vent

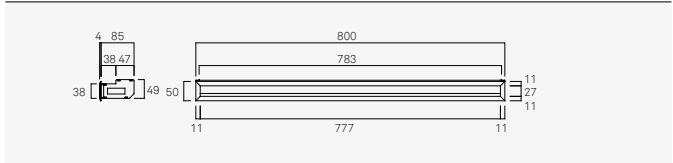


D1007 Single air outlet diffuser vent

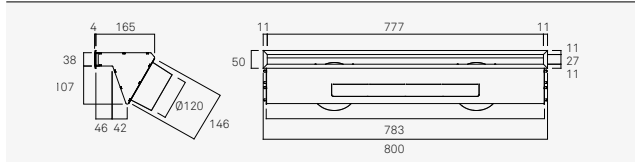


D0010 Triple air inlet diffuser vent

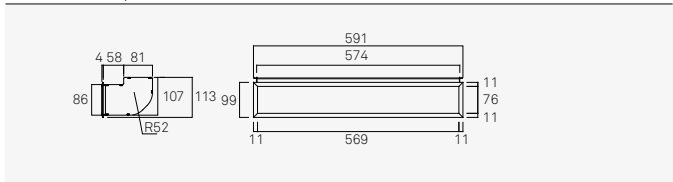


D1010 Triple air outlet diffuser vent

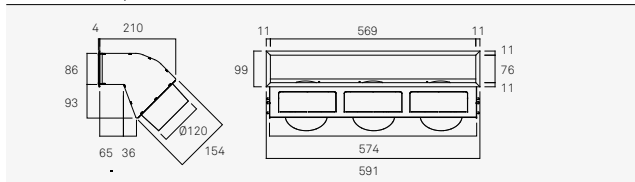

D0015 Quadruple air inlet diffuser vent

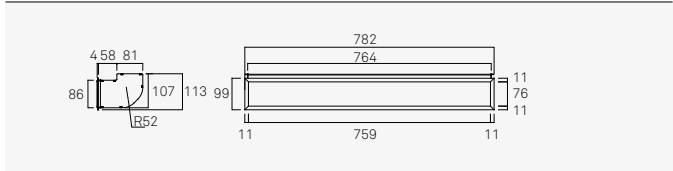

D1015 Quadruple air outlet diffuser vent

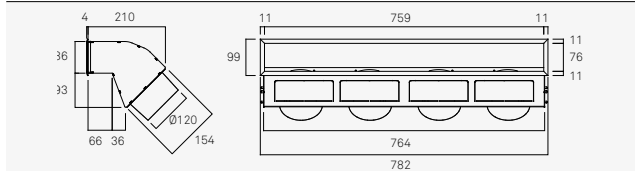

LOG STORE

An ideal space for storing logs.

Cut-outs for three shelves and light in upper section.




Outlet diffuser vent

Inlet diffuser vent



Wood store

C1000 Wood store

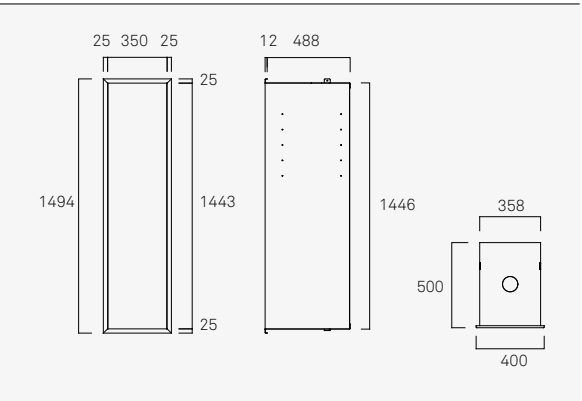



04. INSERTS

Inserts act as heat recoverers. They are designed to be inserted in existing or new built open fireplaces, achieving excellent efficiency and output.

Thanks to their forced fans system, air circulates in a way that optimises heat distribution, thus reaching an ideal temperature and covering a larger area.





● ARc 70A Equipped with ECOntrol

04. INSERTS

ARc ARc + plus

FEATURES

Reversible front door.
Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing with optional hot air conduction.
Segregated hot air direction control: right and left for outlet from front or above.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from front.
Double deflector, top deflector with two-position adjustable flow.
Two or four fans unit with two automatic speed settings and one manual.

OPTIONAL ITEMS

Adapter for standard four-sided frame.
Decorative frame 10 cm.
Fans speed controller.
ECOnrol automatic combustion control.
Adjustable, levelling stand.
+Plus.

FITTING ACCESSORIES

Inlet/outlet diffusers.
Wood store.

More details: Pages 110 - 111 / 120 - 121

	ARc 70 M5911	ARc 70 M5911 +Plus 150 C4050	ARc 70 A M5916	ARc 70 A M5916 +Plus 150 C4050	ARc 70 C M5921	ARc 70 C M5921 +Plus 150 C4050	ARc 80 M5931	ARc 80 M5931 +Plus 180 C4060	ARc 100 M5941
	75,50%	85,30%	75,50%	85,30%	75,50%	85,30%	77,55%	85,30%	79,57%
	8 kW	8,8 kW	8 kW	8,8 kW	8 kW	8,8 kW	9,6 kW	9 kW	11,2 kW
	5,5-9,5kW	5,5-9,5kW	5,5-9,5 kW	5,5-9,5 kW	5,5-9,5 kW	5,5-9,5 kW	6,5-11,5 kW	6,5-11,5 kW	7,5-13 kW
	0,08%	0,06%	0,08%	0,06%	0,08%	0,06%	0,09 %	0,06%	0,09 %
	36 mg/Nm³	22,9 mg/Nm³	36 mg/Nm³	22,9 mg/Nm³	36 mg/Nm³	22,9 mg/Nm³	33,5 mg/Nm³	22,9 mg/Nm³	31 mg/Nm³
	2,4 kg/h	2,4 kg/h	2,4 kg/h	2,4 kg/h	2,4 kg/h	2,4 kg/h	2,8 kg/h	2,44 kg/h	3,2 kg/h
	97 kg	112,8 kg	103 kg	118,8 kg	92 kg	107,8 kg	121 kg	138,9 kg	143 kg
	45 cm		45 cm		45 cm		50 cm		60 cm
NOx	118 mg/Nm³	106 mg/Nm³	118 mg/Nm³	106 mg/Nm³	118 mg/Nm³	106 mg/Nm³	107,5 mg/Nm³	106 mg/Nm³	97 mg/Nm³
OGC	78 mg/Nm³	51 mg/Nm³	78 mg/Nm³	51 mg/Nm³	78 mg/Nm³	51 mg/Nm³	85 mg/Nm³	51 mg/Nm³	92 mg/Nm³
	UNE EN-13229 UNE EN-60335		UNE EN-13229 UNE EN-60335		UNE EN-13229 UNE EN-60335		UNE EN-13229 UNE EN-60335		UNE EN-13229 UNE EN-60335

A



A+



CONTO TERMICO

A



A+



CONTO TERMICO

A



A+



CONTO TERMICO

A



A+




CONTO TERMICO

A




ARc 70 / ARc 70A / ARc 70 C



2 fans unit
with 2 automatic speed
settings
and 1 manual.


ARc 80 / ARc 100




4 fans unit
with 2 automatic speed
settings and 1 manual.




+Plus




	+Plus 150	+Plus 180
A	Ø150	Ø180
B	Ø155	Ø185
C	Ø223	Ø257

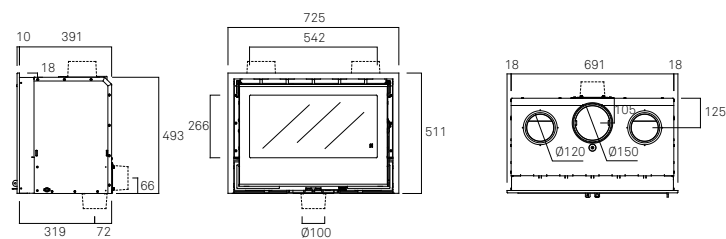


ARc 70 A

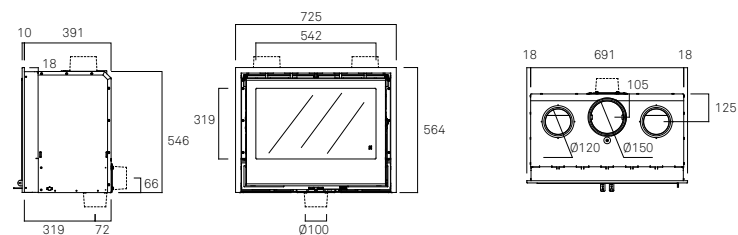


ARc 70 C

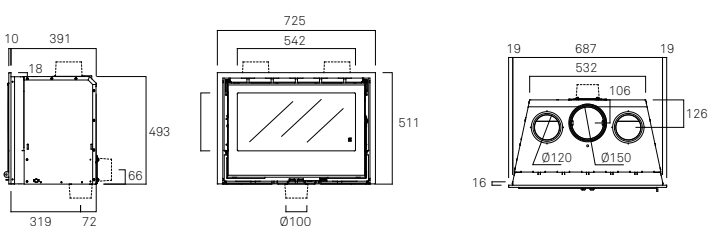

ARc 80

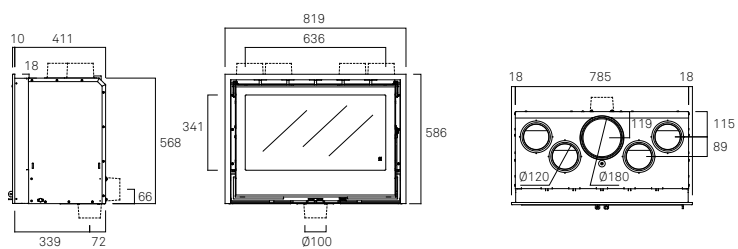

ARc 100

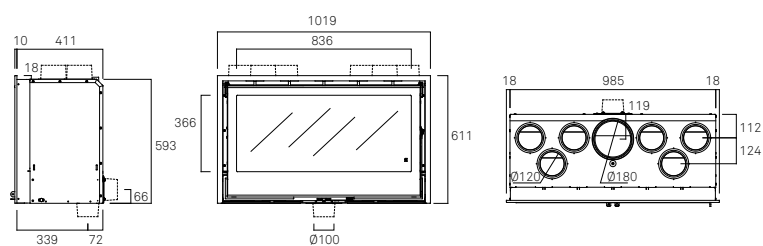

04. INSERTS



● ARc 50V

ARc 50V

ARc 50V + plus

FEATURES

Reversible front door.
Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing with optional hot air conduction.
Segregated hot air direction control: right and left for outlet from front or above.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from front.
Double deflector, top deflector with two-position adjustable flow.
Two fans unit with two automatic speed settings and one manual.

Can be supplied without fans unit on request.

OPTIONAL ITEMS

Adapter for standard four-sided frame.
Decorative frame 10 cm.
Fans speed controller.
ECOnrol automatic combustion control.
Adjustable, levelling stand.
+Plus.

FITTING ACCESSORIES


Inlet/outlet diffusers.
Wood store.

Pages 110 - 111 / 120 - 121


	ARc 50V M5971	ARc 50V M5971 +Plus 150 C4050
η	77,16%	86,30%
 nom	6,3 kW	8,7 kW
	4 - 7 kW	4 - 9 kW
	0,06%	0,048%
	23 mg/Nm ³	13 mg/Nm ³
	2 kg/h	2,3 kg/h
	98 kg	113,8 kg
	33 cm	
NOx	98 mg/Nm ³	102 mg/Nm ³
OGC	53 mg/Nm ³	51 mg/Nm ³
	UNE EN-13229 UNE EN-60335	
		
		
		
		



ARc 50V

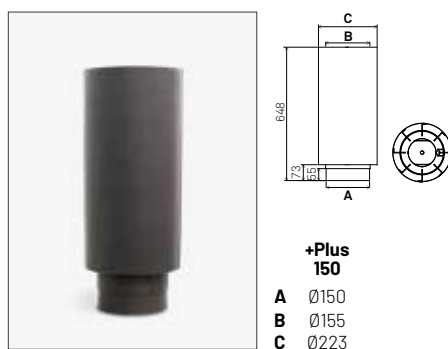

+Plus

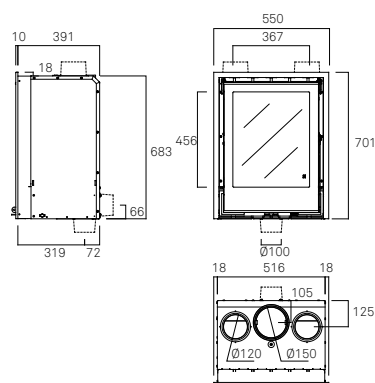

ARc 40V

FEATURES

- Reversible front door.
- Steel combustion chamber.
- Vermiculite inner lining.
- Wraparound casing in 6 mm steel.
- Optional external air inlet.
- Preheated primary and secondary air.
- Tertiary or security air.
- Ash pan removal from the front.
- Triple deflector, the lower adjustable.
- Option EControl automatic combustion control.

OPTIONAL ITEMS

3-sided 2.5 cm frame with adaptor for 4 sides.

FITTING ACCESSORIES

Inlet/outlet diffusers.
Wood store.

Pages 110 - 111 / 120 - 121




ARc 40V

M5974

η	84 %
 nom	4,5 kW
	3-5,5 kW
	0,10%
	- mg/Nm ³
 kg/h	1,3 kg/h
 kg	75,6 kg
 cm	25 cm
NOx	- mg/Nm ³
OGC	- mg/Nm ³
	UNE EN-13229

A+

ARc 40V

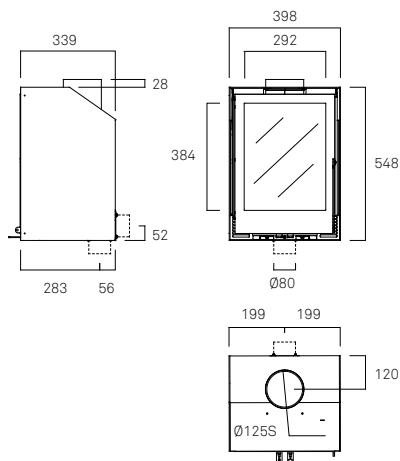



● ARc 40V

04. INSERTS

ARc DC
ARc DC + plus

FEATURES

- Reversibles doors.
- Steel combustion chamber.
- Vermiculite inner lining.
- Wraparound casing with optional hot air conduction.
- Optional external air inlet.
- Preheated primary and secondary air.
- Double deflector, the lower one with two positions for draught adjusting.
- Steel-coated vermiculite base.

OPTIONAL ITEMS

- Adapter for standard four-sided frame.
- Decorative frame 10 cm.
- ECONtrol automatic combustion control.
- +Plus.

FITTING ACCESSORIES


- Inlet/outlet diffusers.

Pages 110 - 111 / 120 - 121


	ARc 80 DC M5981	ARc 80 DC M5981 +Plus 180 C4060	ARc 100 DC M5986	ARc 100 DC M5986 +Plus 180 C4060
	82 %	85,7 %	80 %	75,90%
	13 kW	12,4 kW	12 kW	13,4 kW
	8,5 - 14,5 kW	8,5 - 14,5 kW	9 - 16 kW	9-16 kW
	0,12%	0,107%	0,11%	0,101%
	39,67 mg/Nm³	34,00 mg/Nm³	41,30 mg/Nm³	16,3 mg/Nm³
	3,45 kg/h	3,55 kg/h	3,52 kg/h	4 kg/h
	160 kg	177,9 kg	216 Kg	233,9 Kg
	40 cm	40 cm	55 cm	55 cm
NOx	94,29 mg/Nm³	108,00 mg/Nm³	109,90 mg/Nm³	102 mg/Nm³
OGC	144,06 mg/Nm³	141,00 mg/Nm³	139,46 mg/Nm³	81 mg/Nm³
	UNE EN-13229	UNE EN-13229	UNE EN-13229	UNE EN-13229
	A+	A+	A+	A
	AEFECC 7*	AEFECC 7*	AEFECC 6*	AEFECC 7*
	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186	Stelle ambientale ★★★★★ DECRETO 7 NOVEMBRE 2017 N. 186
	CONTO TERMICO	CONTO TERMICO		




+Plus



ARc 80 DC

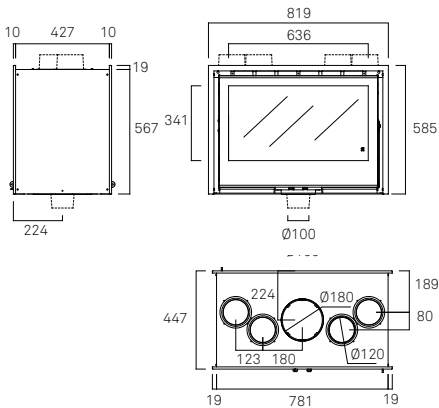

ARc 100 DC

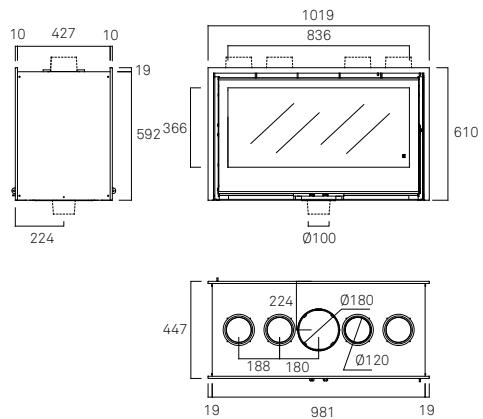







● ARc 76 LD

04. INSERTS

ARc LD/LI
ARc LD/LI + plus

FEATURES

- Steel combustion chamber.
- Vermiculite inner lining.
- Wraparound casing with optional hot air conduction.
- Segregated hot air direction control: right and left for outlet from front or above.
- Optional external air inlet.
- Preheated primary and secondary air.
- Tertiary or safety air.
- Ash pan removal from front.
- Double deflector, top deflector with two-position adjustable flow.
- Two fans unit with two automatic speed settings and one manual.

Can be supplied without fans unit on request.

OPTIONAL ITEMS


- 4-cm frame.
- Fans speed controller.
- ECOnrol automatic combustion control.
- +Plus.

FITTING ACCESSORIES

- Inlet/outlet diffusers.
- Wood store.

Pages 110 - 111 / 120 - 121


	ARc 76 LD M5952	ARc 76 LI M5953	ARc 76 LD M5952 +Plus 180 C4060	ARc 76 LI M5953 +Plus 180 C4060	ARc 96 LD M5955	ARc 96 LI M5956
η	84%		77,3%		81%	
nom	9,7 kW		9,4 kW		10,2 kW	
	6,5-11 kW		6,5-11 kW		7-12 kW	
CO	0,094%		0,08%		0,15%	
	27,68 mg/Nm³		16,4 mg/Nm³		25,42 mg/Nm³	
kg/h	2,74 kg/h		2,8 kg/h		2,86 kg/h	
kg	136 Kg		153,9 Kg		187 Kg	
cm	40 cm		40 cm		50 cm	
NOx	100,17 mg/Nm³		104 mg/Nm³		91,95 mg/Nm³	
OGC	93,34 mg/Nm³		66 mg/Nm³		122,24 mg/Nm³	
UE	UNE EN-13229 UNE EN-60335		UNE EN-13229 UNE EN-60335		UNE EN-13229 UNE EN-60335	
	A+		A		A+	
	AEFECC 7*		AEFECC 7*		AEFECC 6*	
	Stella ambientale ★★★★★		Stella ambientale ★★★★★		Stella ambientale ★★★★★	

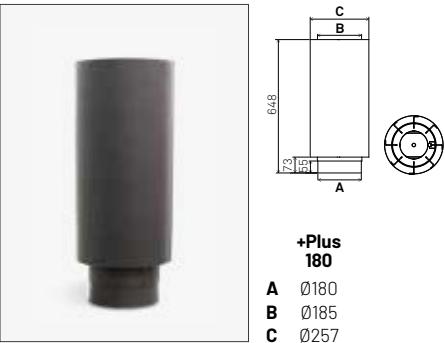


+Plus




ARc 76 LD

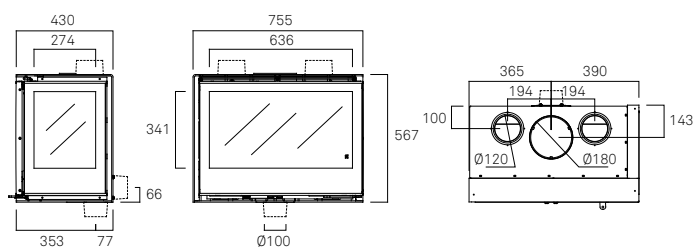


ARc 76 LI

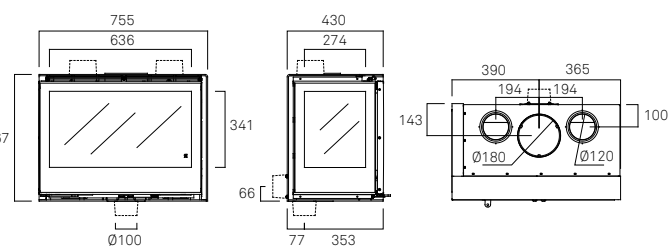

ARc 96 LD

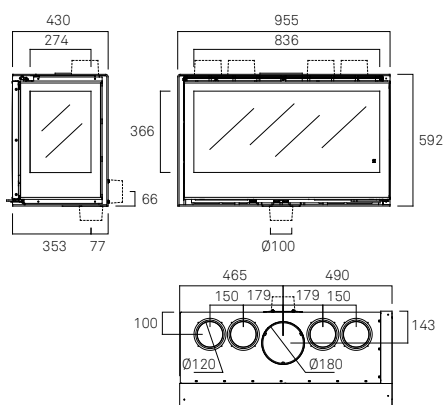

ARc 96 LI

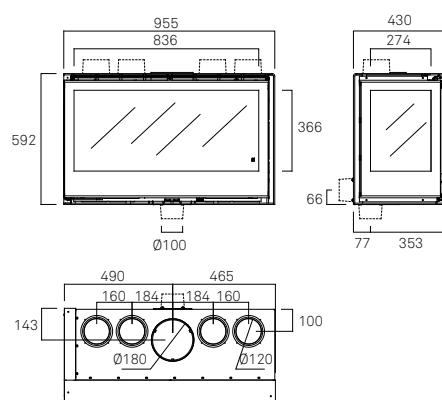

04. INSERTS

ARc 73TC

ARc 73TC + plus

FEATURES

Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing with optional hot air conduction.
Segregated hot air direction control: right and left for outlet from front or above.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from front.
Double deflector, top deflector with two-position adjustable flow.
Two (73 TC) or four (93 TC) fans kit with two automatic speed settings and one manual.

OPTIONAL ITEMS

4-cm frame.
Fans speed controller.
EControl automatic combustion control.
+Plus.

FITTING ACCESSORIES

Inlet/outlet diffusers.
Wood store.

Pages 110 - 111 / 120 - 121

Can be supplied without fans unit on request.

	ARc 73 TC M5963	ARc 73 TC M5963 +Plus 180 C4060
η	80,8%	85,01%
$\dot{Q}_{nom}$	11,4kW	11,1 kW
$\dot{Q}$	7,5-13 kW	7,5-13 kW
CO	0,11%	0,09%
mg/Nm^3	39,81	38,76
kg/h	3,4	2,8
kg	114	149,9
cm	45	45
NOx	104,89 mg/Nm^3	71,5 mg/Nm^3
OGC	98,78 mg/Nm^3	36,69 mg/Nm^3
UE	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335

A+

AEFECC 7*

Stelle ambientale
★★★★★
DECRETO 7 NOVEMBRE 2017 N. 186

A+


AEFECC 7*

Stelle ambientale
★★★★★
DECRETO 7 NOVEMBRE 2017 N. 186

CONTO TERMICO




+Plus



+Plus
180
A Ø180
B Ø185
C Ø257



ARc 73 TC

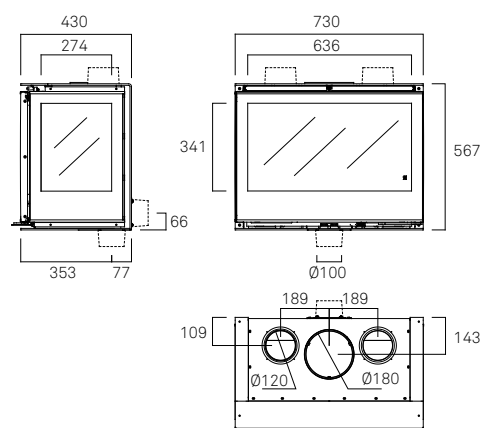



● ARc 73 TC



● ARc 93 TC Equipped with EControl

ARc 93TC

FEATURES

Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing with optional hot air conduction.
Segregated hot air direction control: right and left for outlet from front or above.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from front.
Double deflector, top deflector with two-position adjustable flow.
Two (73 TC) or four (93 TC) fans kit with two automatic speed settings and one manual.

Can be supplied without fans unit on request.

OPTIONAL ITEMS

4-cm frame.
Fans speed controller.
ECOntrl automatic combustion control.
+Plus.

FITTING ACCESSORIES

Inlet/outlet diffusers.
Wood store.

Pages 110 - 111 / 120 - 121

ARc 93 TC M5965

η	79%
nom	12,1 kW
	8,5-14,5 kW
CO	0,07%
	39,5 mg/Nm ³
kg/h	3,47 kg/h
kg	161 kg
cm	60 cm
NOx	82,72 mg/Nm ³
OGC	52,66 mg/Nm ³
	UNE EN-13229 UNE EN-60335

A

AEFECC 7*


Stelle ambientale
★★★★★
DECRETO 7 NOVEMBRE 2017 N. 189



ARc 93 TC




+Plus




+Plus
180

A Ø180
B Ø185
C Ø257

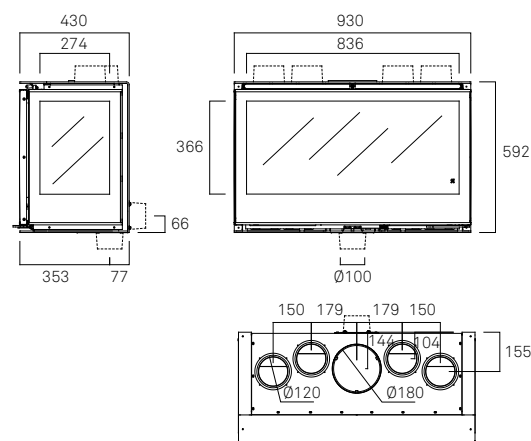

General features

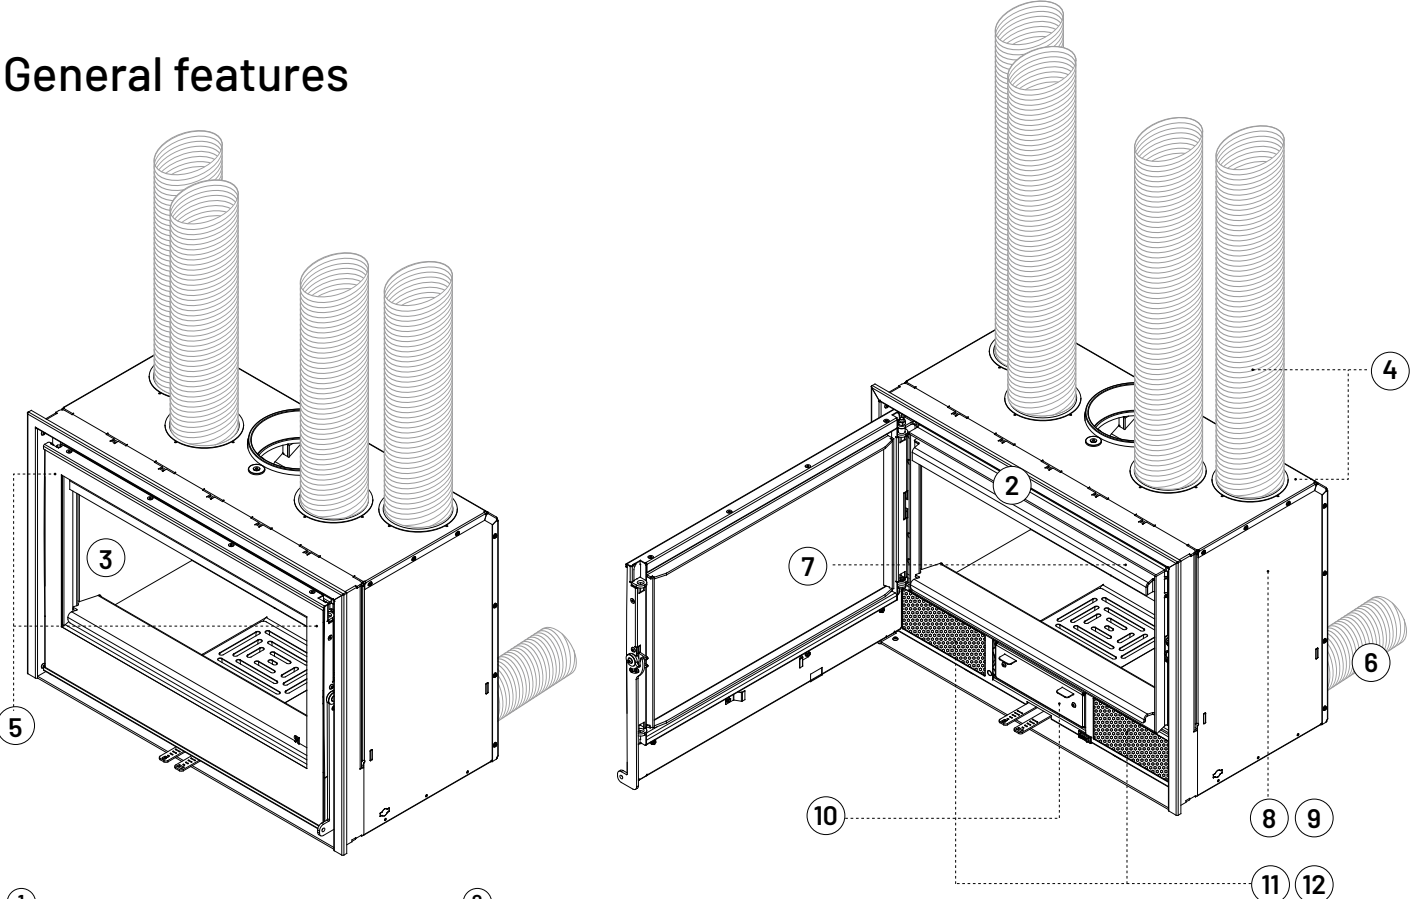

1



Reversible front door.
(Except model TC, LD and LI)

2



Steel combustion chamber.
The highly robust combustion chamber ensures the long life of these appliances..

3



Vermiculite inner lining.

6



External air inlet.

10



Ash pan.
Except ARc 80DC and ARc 100DC.

4



Wrap-around casing and optional hot air conduction.
(only for inserts)

7



Preheated secondary air.

11



2 fans unit
with 2 automatic speed settings and 1 manual.

5



Air direction control from front or above.
(only for inserts)

8



8 Tertiary or safety air.
9 Preheated primary air.

12



4 fans kit
with 2 automatic speed settings and 1 manual.

Optional items



Adaptor for standard 4-sided frame.




+ Plus 150
C4050

+ Plus 180
C4060



DECORATIVE FRAME 10cm:


*Paintings can be adapted to any size. (Except lateral models and three sided models)



LD / LI



TC



C6005

C6010


Adjustable, levelling stand.

				FRAME				
				2,5 cm	4 cm	10 cm		
ARc 70	M5705-11	✓	✗	-	-	M5705-13	✓	✗
ARc 70 A	M5705-11	✓	✗	-	-	M5707-13	✓	✗
ARc 70 C	M5705-11	✓	✗	-	-	M5921-13	✓	✗
ARc 80	M5710-11	✗	✓	-	-	M5710-13	✓	✗
ARc 100	M5715-11	✗	✗	-	-	M5715-13	✓	✗
ARc 50 V	M5971-11	✓	✗	-	-	M5971-13	✓	✗
ARc 40 V	-	✗	✗	M5974-11 Includes adaptor	-	-	✗	✗
ARc 80 DC	M5710-11	✗	✓	-	-	M5710-13	✗	✗
ARc 100 DC	M5715-11	✗	✓	-	-	M5715-13	✗	✗
ARc 76 LD / LI	-	✗	✓	-	M5952-11	-	✗	✓
ARc 96 LD / LI	-	✗	✓	-	M5955-11	-	✗	✓
ARc 73 TC	-	✗	✓	-	M5963-11	-	✗	✓
ARc 93 TC	-	✗	✓	-	M5965-11	-	✗	✓



+Plus

Twinwall pipe for gas cooling. This supplement increases the performance and efficiency of the product, in addition, decreases the particles, NOX and OGC.



	+Plus 150	+Plus 180
A	Ø150	Ø180
B	Ø155	Ø185
C	Ø223	Ø257



ECOnrol

More information on page 134



Adjustable fan speed control:

Speed adjustment with new positions. With four preprogrammed modes. Compatible with G series modules and ARc Inserts.





● RCr 100 graffiti

RCr graffiti

FEATURES

- Reversible front door.
- Steel combustion chamber.
- Vermiculite lining.
- Wrap-around casing and optional hot air conduction.
- Air direction control from front or above.
- Primary and secondary register.
- Ash pan removal from front.
- 2- or 4- fans unit with 2-speed automatic or manual thermostat switch.

OPTIONAL ITEMS

- Adaptor for standard 4-sided frame.
- Decoratives frames, 10 cm.
- Adjustable, levelling stand.


FITTING ACCESSORIES

- Inlet/outlet diffuser vents.
- Wood store.

More details: Pages 118 - 121


	RCr 70 graffiti	RCr 70 A graffiti	RCr 80 graffiti	RCr 100 graffiti
	M5706	M5708	M5711	M5716
	79,5%	79,5%	81%	80%
	7,5 kW	7,5 kW	9,3 kW	10,5 kW
	5-9 KW	5-9 KW	6-11 KW	7-12,5 KW
	0,12%	0,12%	0,13%	0,26%
	16 mg/Nm³	16 mg/Nm³	19 mg/Nm³	20 mg/Nm³
	2,2 kg/h	2,2 kg/h	2,4 kg/h	3,2 kg/h
	95 kg	99 kg	119 kg	148 kg
	45 cm	45 cm	50 cm	60 cm
NOx	- mg/Nm³	- mg/Nm³	- mg/Nm³	- mg/Nm³
OGC	- mg/Nm³	- mg/Nm³	- mg/Nm³	- mg/Nm³
	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335
	A+	A+	A+	A
	AEFECC 7*	AEFECC 7*	AEFECC 6*	AEFECC 5*

RCr 70 / RCr 70A




2 fans unit with 2 manual speed settings and 1 automatic.

RCr 80 / RCr 100




4 fans unit with 2 manual speed settings and 1 automatic.




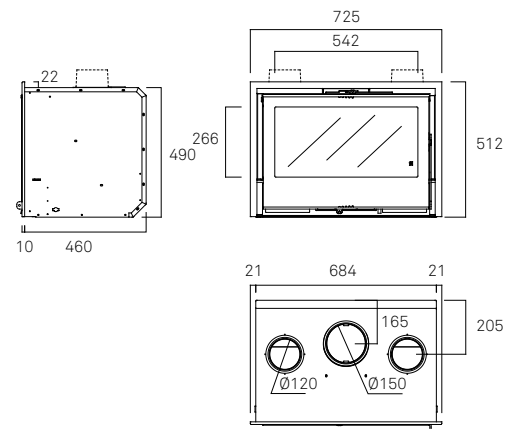


RCr 70 A graffiti

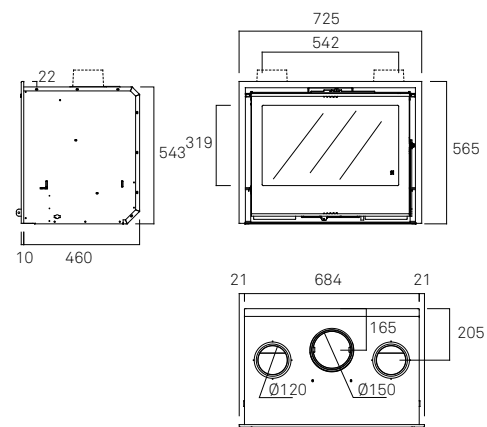

RCr 80 graffiti

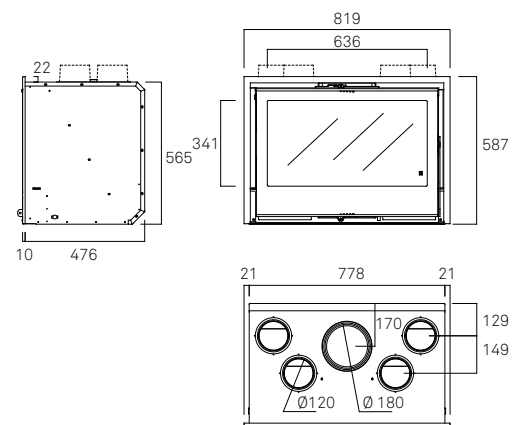

RCr 100 graffiti

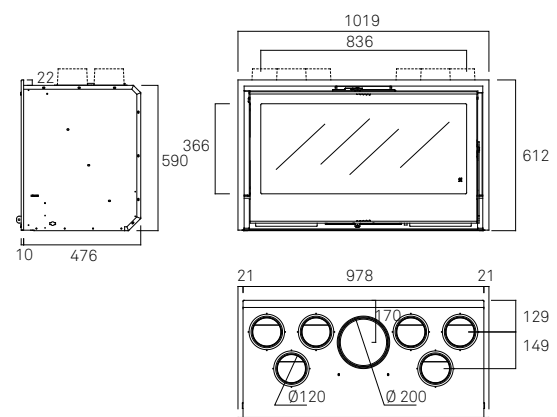

04. INSERTS

RCr classic

FEATURES

- Reversible front door.
- Steel combustion chamber.
- Vermiculite lining.
- Wrap-around casing and optional hot air conduction.
- Air direction control from front or above.
- Primary and secondary register.
- Ash pan removal from front.
- 2- or 4- fans unit with 2-speed automatic or manual thermostat switch.

OPTIONAL ITEMS

- Adaptor for standard 4-sided frame.
- Decorative frames, 10 cm.
- Adjustable, levelling stand.

FITTING ACCESSORIES


- Inlet/outlet diffuser vents.
- Wood store.

More details: Pages 118 - 121


	RCr 65 classic	RCr 70 classic	RCr 80 classic
	M5700	M5705	M5710
	77%	79,5%	81%
	6,7 kW	7,5 kW	9,3 kW
	4,5-7,5 KW	5-9 KW	6-11 KW
	0,26%	0,12%	0,13%
	- mg/Nm³	16 mg/Nm³	19 mg/Nm³
	1,9 kg/h	2,2 kg/h	2,4 kg/h
	79,5 kg	99 kg	119 kg
	40 cm	45 cm	50 cm
NOx	- mg/Nm³	- mg/Nm³	- mg/Nm³
OGC	- mg/Nm³	- mg/Nm³	- mg/Nm³
	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335
A A+ A+			
 AEFECC 7*  AEFECC 6*			




RCr 65 classic

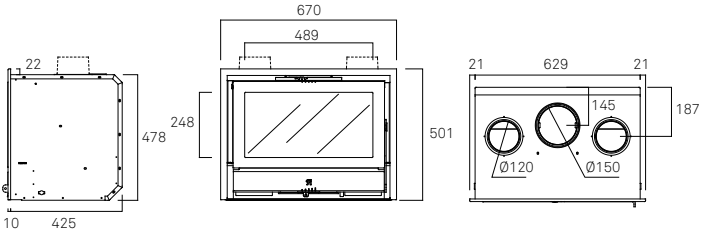

RCr 70 classic

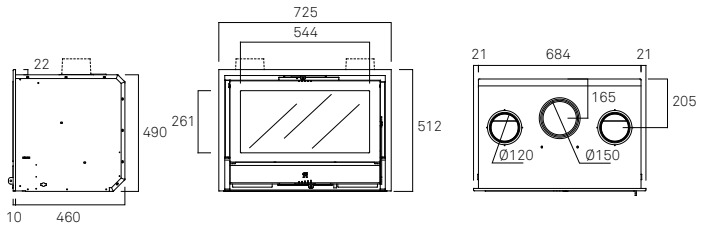

RCr 80 classic

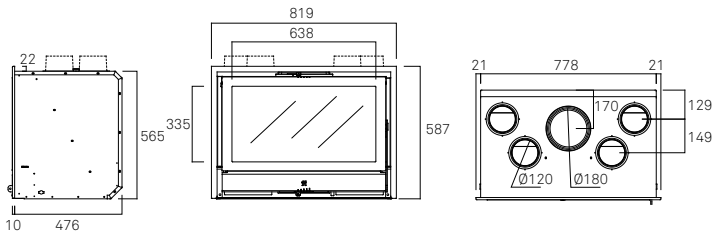




● RCr 70 classic



RCr 65 / RCr 70

2 fans unit with 2 manual speed settings and 1 automatic.




RCr 80

4 fans unit with 2 manual speed settings and 1 automatic.

General features



Vermiculite lining.

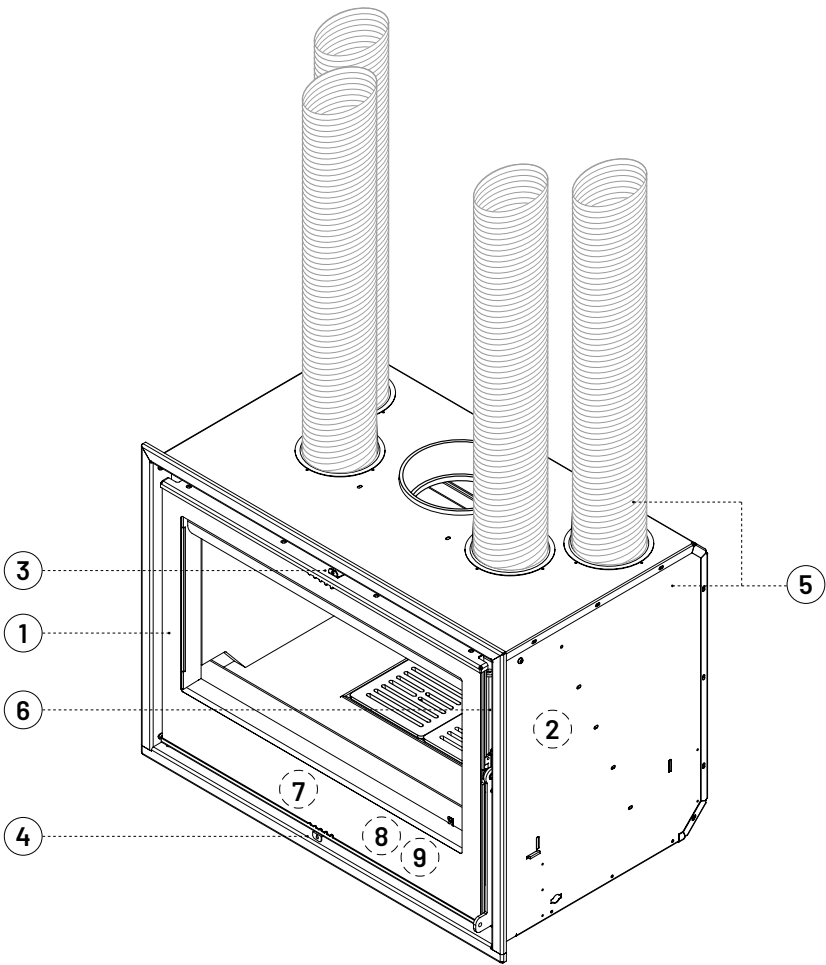

* Exploratory diagram Model RCr80 graffiti



Reversible front door.



Steel combustion chamber.
The high robustness of the combustion chamber ensures the long life of these devices.



Wrap-around casing and optional hot air conduction.



2- fans unit with 2-speed automatic or manual thermostat switch (270 m³/h).



Secondary register.
Mechanism that provides oxygen for combustion through the upper part of the glass.



Air direction control from front or above.



4- fans unit with 2-speed automatic or manual thermostat switch (540 m³/h). (RCr 80, RCr 100)



Primary register.
Mechanism that provides oxygen for combustion through the fire grille.



Ash pan removal from front.


Optional items



Adaptor for standard
4-sided frame.



FRAME
10 cm



C6000

Adjustable, levelling stand.

RCr 65 classic	M5700-11	M5700-13	✓
RCr 70 graffiti	M5705-11	M5705-13	✓
RCr 70 classic			
RCr 70 A graffiti	M5707-11	M5707-13	✓
RCr 80 graffiti	M5710-11	M5710-13	✓
RCr 80 classic			
RCr 100 graffiti	M5715-11	M5715-13	✓

04. INSERTS


Fitting accessories

Our range of fitting accessories makes home installation easier and helps you achieve the right look.


DIFFUSER VENTS

With the aim of providing solutions when inserts and fireplaces are fitted in completed buildings, we have created a range of diffuser vents that ensure proper convection-air inlet and outlet, i.e. the proper venting of the hearth, and help to integrate these components, which can be difficult to add..


C4000 Diffuser vent with hinged inlet

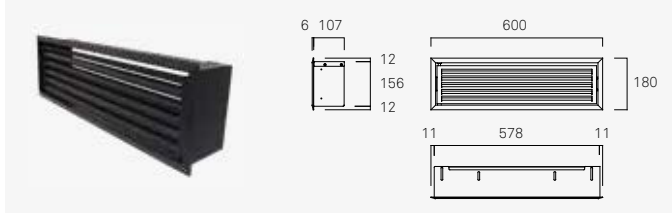


D0000 Single air inlet diffuser vent

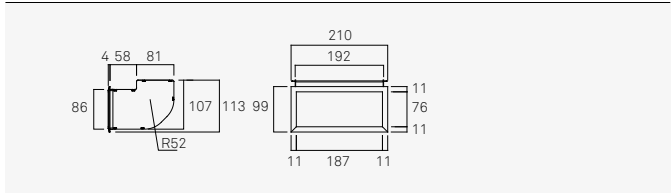


D1000 Single air outlet diffuser vent

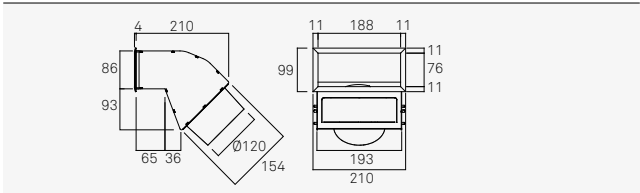


D0002 Single air inlet diffuser vent

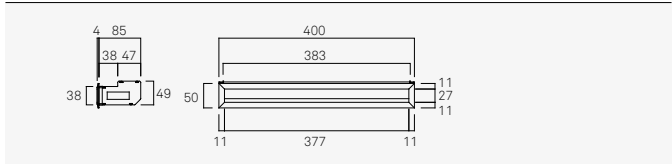


D1002 Single air outlet diffuser vent

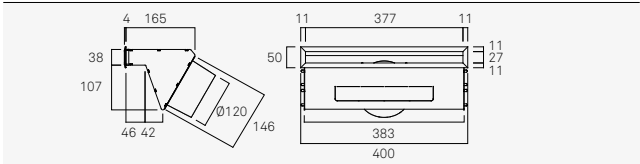


D0005 Double air inlet diffuser vent

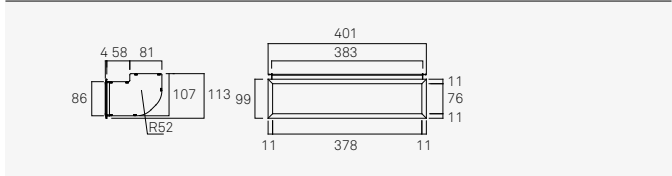


D1005 Double air outlet diffuser vent

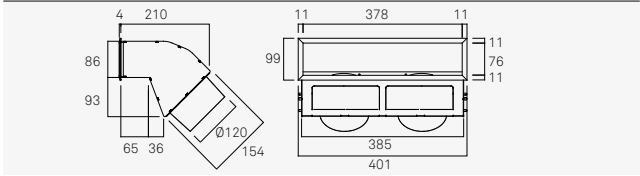


D0007 Double air inlet diffuser vent

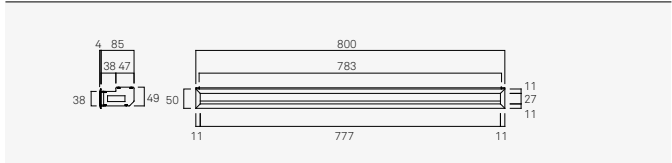


D1007 Single air outlet diffuser vent

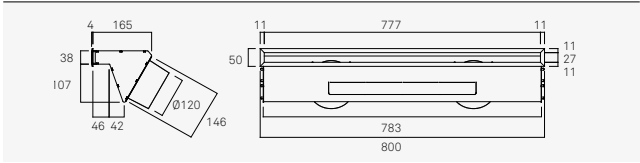


D0010 Triple air inlet diffuser vent

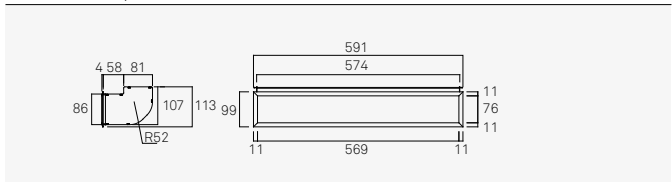


D1010 Triple air outlet diffuser vent

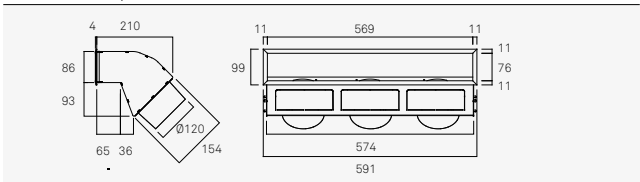

D0015 Quadruple air inlet diffuser vent

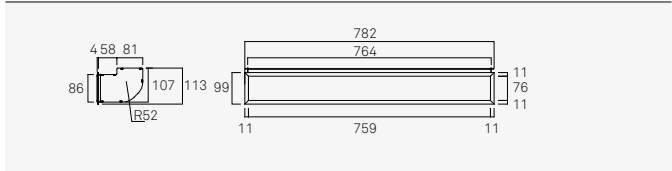

D1015 Quadruple air outlet diffuser vent

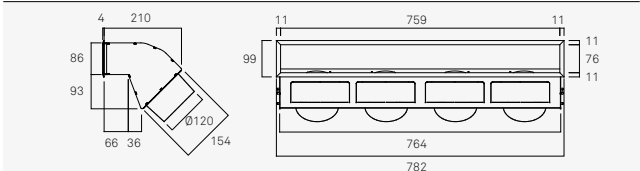

LOG STORE

An ideal space for storing logs.

Cut-outs for three shelves and light in upper section.




Outlet diffuser vent

Inlet diffuser vent



Wood store

C1000 Wood store

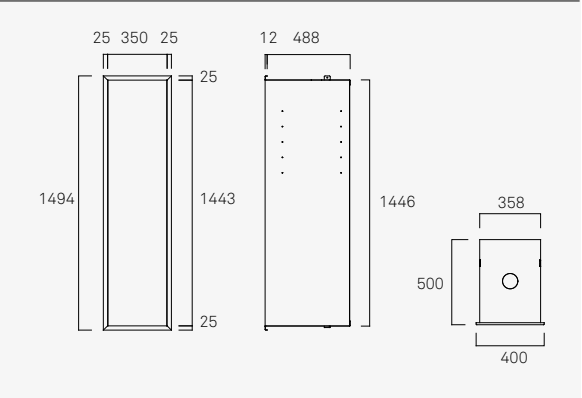



05.

THERMO-FIREPLACE

Fireplace-boiler for heating

The Termogar thermo-fireplace is a biomass boiler. It runs on the greenest, cheapest, most easily obtainable renewable energy source there is: wood.

Experts have confirmed that wood provides heat more cheaply other energy sources, both renewable and conventional (gas, gas oil and electricity) and, of course, is more ecological.

The Termogar can be used as a single heat source or as part of a mixed system, combining renewable energy with fossil fuels. Certification under European standards guarantees its quality and efficiency.

Termogar LN70

Termogar LN70

W1501

Total theoretical heat output	24,3 kw
Useful heat output	22 kw
Heat output transferred to water	19,5 kw
Water heating efficiency	89%
Global efficiency	85%
Fuel consumption	5,5 kg/h
Water content	70 l
Net weight	237 kg
Operating pressure	1,8 bar
Maximum pressure	3 bar
CO at 13% O ₂ ²	0,24%





50 cm



UNE EN-13229

A+

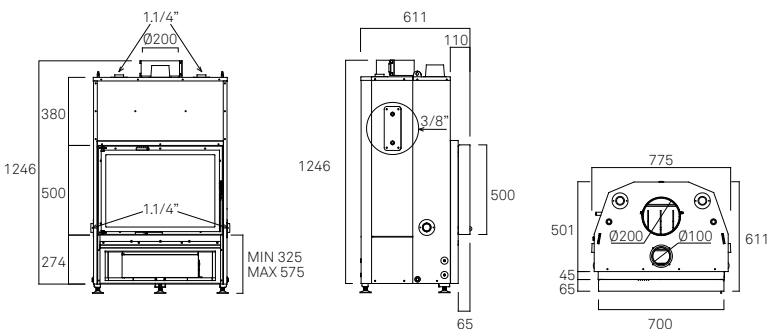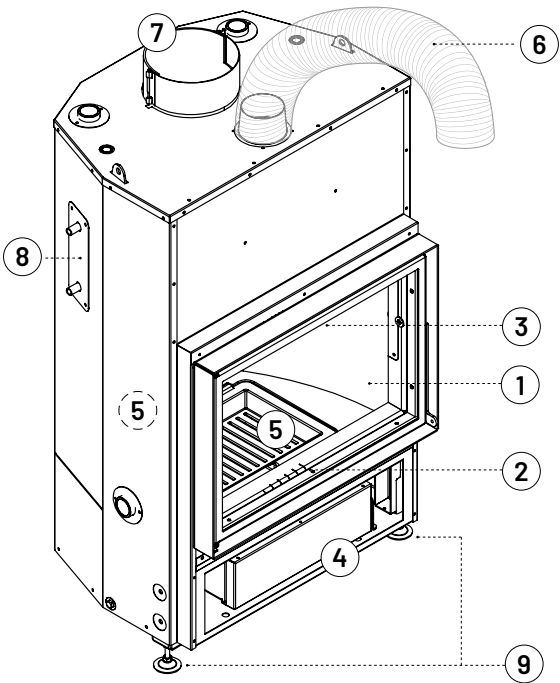

Side-opening door.



Primary control.
Mechanism that provides oxygen for combustion through the fire grille.



Secondary control.
Mechanism that provides oxygen for combustion, by means of double combustion and the upper part of the glass.



Ash pan removal from above or below.



● LN 70

⑤



Steel combustion chamber (5 mm).
The high robustness of the combustion chamber ensures the long life of these devices.

⑥



External air inlet.
Guarantees that the air in the house is healthier. Does not interfere with domestic air extraction devices, such as those in the kitchen and bathroom.

⑦



Insulated wrap-around casing.

⑧



Serpentine
Stainless steel cooling coil for closed water circuit with expansion vessel.

⑨



Extending, levelling feet.

05. THERMO-FIREPLACE

Optional items



C5000

Thermal discharge valve for the closed circuit.




C5100

Two pump control, water temperature visualization, 3 valve way, auxiliary output, flow switch.


FRAME:

Option to finish the final appearance by adding a frame.

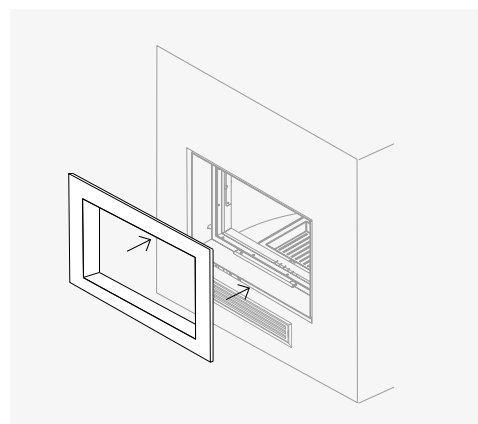

W1501-11 4-cm frame.


How it works

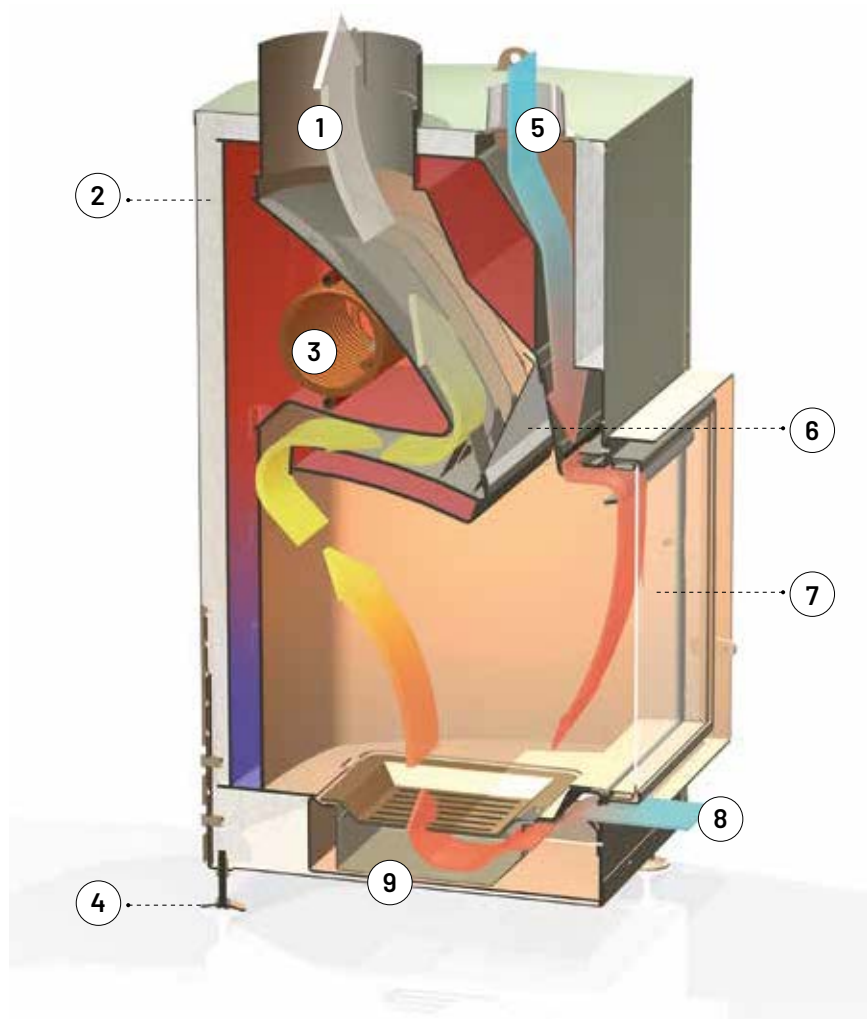

- ① Combustion gas circuit (with loading door closed).
- ② Wrap-around casing and ceramic insulation.
- ③ Serpentine: System internal cooling circuit (W1501).
- ④ TERMOGAR: Extending, levelling feet.
- ⑤ Air inlet circuit (preferably exterior) for combustion.
- ⑥ Smoke outlet control. Automatic.
- ⑦ Glazed loading door (glass-ceramic 800°C).
- ⑧ Primary air inlet for ignition and combustion.
- ⑨ Hinged fire grate and ash pan.

Fitting accessories

C4000 Diffuser vent with hinged inlet

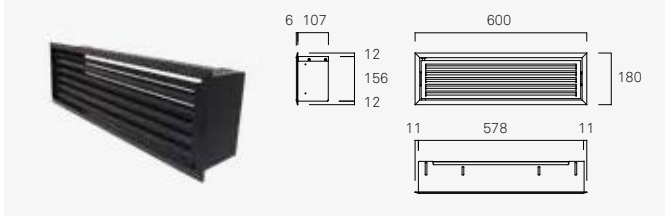


LOG STORE

An ideal space for storing logs.

Cut-outs for three shelves and light in upper section.



C1000 Wood store

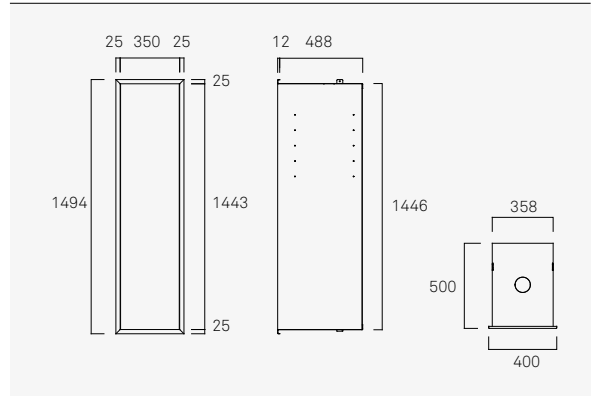

Wood store



06. BARBECUES

Barbecues, the pleasure of al fresco cooking.

Rocal barbecues come in classic styles, are reliable and last a lifetime.

The Plek66 leaves no one indifferent.


06. BARBECUES

Plek 66 inox


The Plek66 leaves no one indifferent. Designed to take up minimum space, this barbecue is ideal for those looking for a practical, quality product but who don't have much space.

Plek 66 inox
B2305

 97 kg
 45 cm

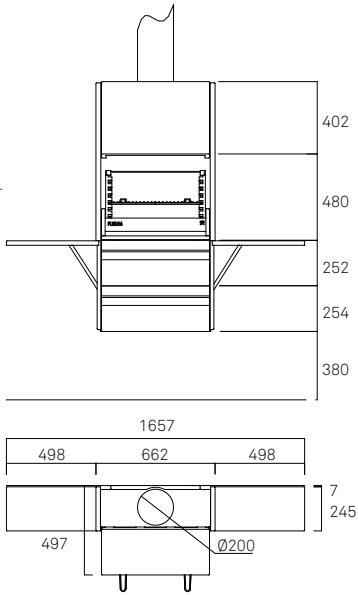

Grill measures (mm): 515x410

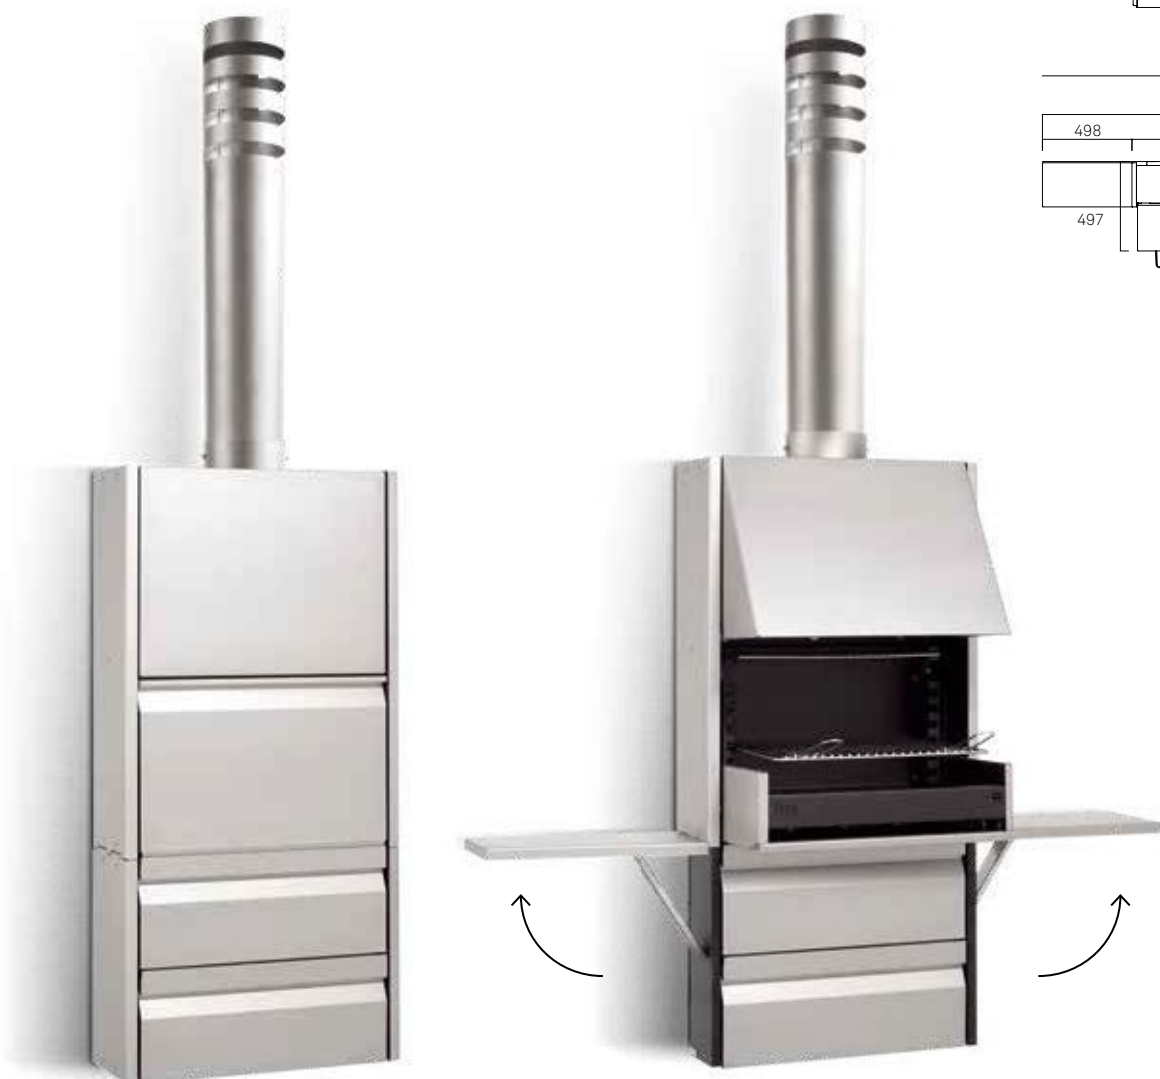

Sides open to form side tables.



Ash collection drawer.



Bottom drawer for charcoal.



When the grill compartment is closed, the hood also closes, and the ash falls into the ash collection drawer.



● Plek 66 inox

Standard accessories



Fish grill and tong.

Optional items

Stainless steel flue 100 cm.
Stainless steel flue 150 cm.

Stainless steel stands.


Palma 75 inox jardín

Stainless steel barbecue with grill and ash box included. Outdoors. This garden version includes a spark guard inside the pipe.

CUSTOM ADAPTATIONS

Stainless steel flue.

Page 133

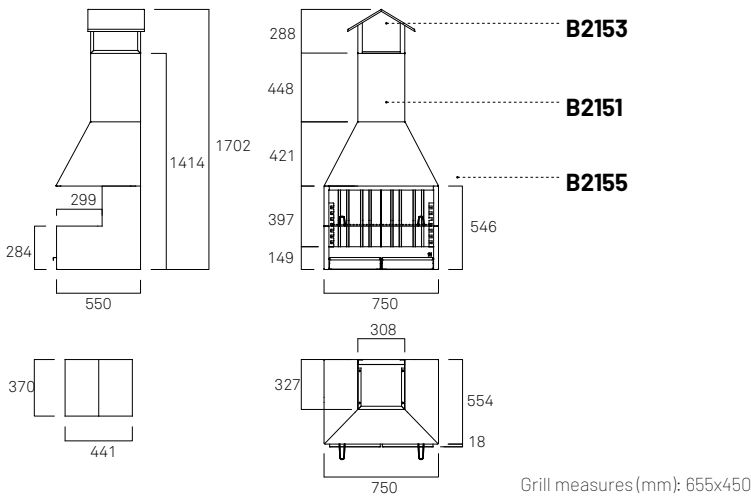

Palma 75 inox porche

Stainless steel barbecue with grill and ash box included. Indoors.


CUSTOM ADAPTATIONS

Stainless steel cover pipe.

Special trim.

Sloped trim.

Page 133

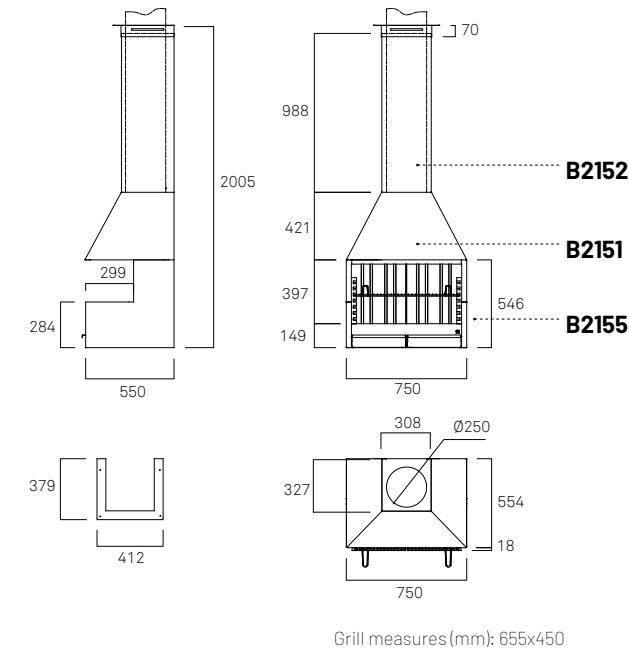

STANDARD ACCESSORIES

Fish grill and tong.

Paella pan.

Page 133


Fornells inox jardín

This barbecue allows 2 fires being used at the same time. Each fire has its own grill and ash pan. Outdoors. This garden version includes a spark guard inside the pipe.

CUSTOM ADAPTATIONS

Stainless steel flue.

Page 133

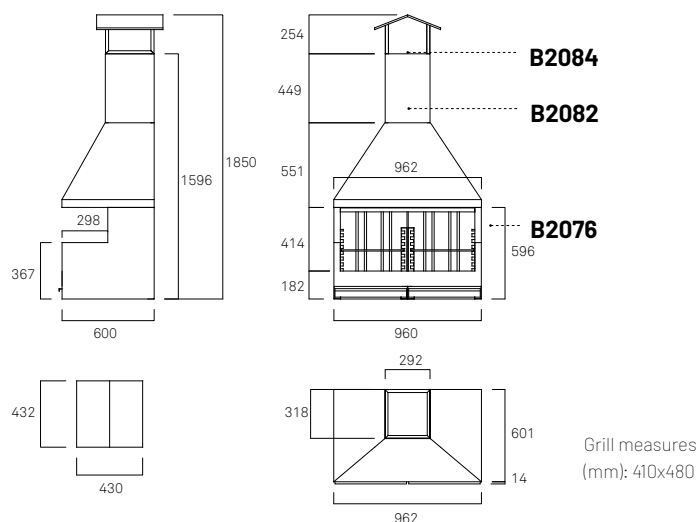

Fornells inox porche

This barbecue allows 2 fires being used at the same time. Each fire has its own grill and ash pan. Indoors.

CUSTOM ADAPTATIONS

Stainless steel cover pipe.

Special trim.

Sloped trim.


Page 133

STANDARD ACCESSORIES


Fish grill and tong.

Paella pan.


Page 133

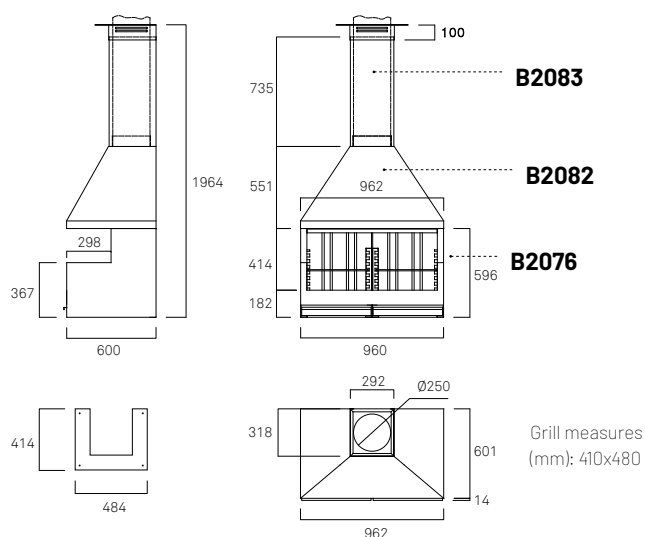


Custom adaptations - Fornells and Palma




Stainless steel flue.



Stainless steel cover pipe.



Special stainless steel trim.



Sloped stainless steel trim.

Standard accessories - Fornells and Palma




Fish grill and tong.



Paella pan.

EControl Smart combustion

EControl:
saving, efficiency and safety

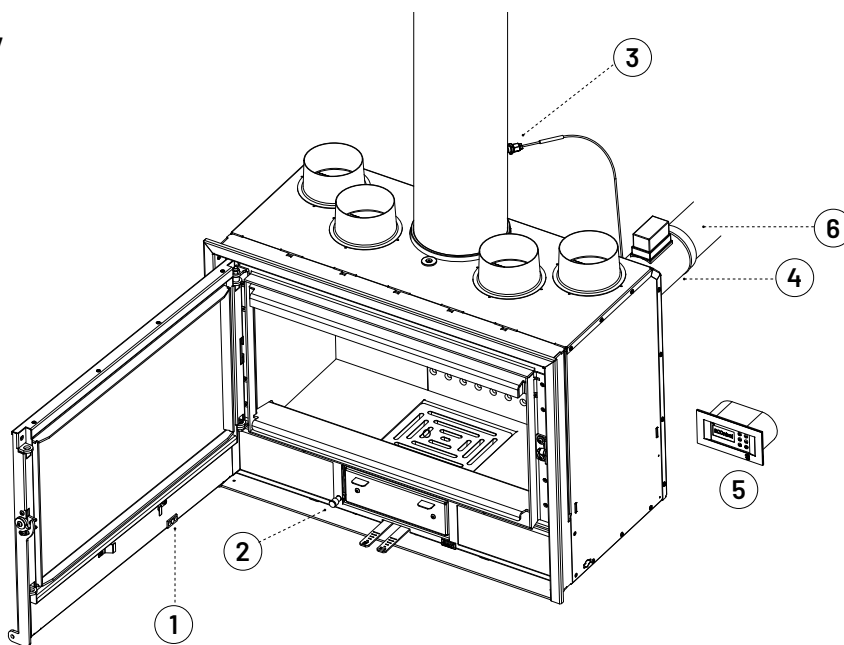

- ① Door magnet
- ② Opening sensor
- ③ Temperature sensor
- ④ Air control valve
- ⑤ Control unit
- ⑥ External air inlet.



EControl:

Intelligent combustion control system.

Compatible with all Rocal models featuring an external air inlet: inserts, G series fireboxes, fireplaces and stoves.

Kit comprising regulator, temperature sensor, door sensor and control valve.

EControl is a revolutionary system for intelligent combustion control. The device manages the air requirements of the fire at each stage of combustion, ensuring it burns correctly and adapting wood consumption to requirements. This achieves a fuel saving of up to 30% and extends the lifespan of the fireplace.

The system has three power settings offering fully configurable operation. EControl is very easy to use: the control process is started by simply pushing a button. This allows the warm elegance of the fire to be enjoyed in a completely worry-free way; for added convenience, the system will let you know when more wood is needed. For your safety, there is a power cut-out mode, which releases control of the fireplace if there is a failure in the power supply, and there is also a high-temperature alarm.

Other products



Ash vacuum cleaner:
Double filter system.
Power rating 1000 W.



Spray paint 150 ml.
Heat-resistant paint up to
600 °C.

Symbols

	Efficiency
	Rated power kW
	Output range
	CO to 13%O ₂ Carbon monoxide emission
	Fuel consumption per hour
	Weight
	Log length
	UNE-EN XXXX certified.
	Particle concentration
NO _x	Mono-nitrogen oxides
OGC	Volatile organic compounds
	Classification according to ECODESIGN (European regulation on energy efficiency)
	AEFECC certificate
	Environmental stars
	Conto termico certificate

Manufacturas Rocal SA

Raval Sant Antoni, 2
08540 Centelles
Barcelona

www.rocal.es

info@rocal.es
T +34 93 8812451
F +34 93 8810631

Manufacturer

Manufacturas Rocal SA

Product design

Manufacturas Rocal SA and Joan Gaspar

Graphic design

Integrum

Photography

Integrum
Foto-disseny JE

Copyright

Manufacturas Rocal SA, April 2019

More information

www.rocal.es

Please note: This catalogue is valid for approximately one year, during which the products may be subject to changes. Consult the distributor or our website for more up-to-date information.

© Copyright of this edition held by Manufacturas Rocal, SA.

All rights reserved. No part of this publication may be reproduced, stored or sent by any means without the permission of Manufacturas Rocal, sa.

Rocal reserves the right to modify any of the features and finishes of its products without prior warning..



ROCAL

MANUFACTURAS SA

Manufacturas Rocal SA

Raval Sant Antoni, 2
08540 Centelles
Barcelona

www.rocal.es

man.rocal@rocal.es
T +34 93 8812451
F +34 93 8810631